



Biosis offices

NEW SOUTH WALES

Newcastle

Phone: (02) 4911 4040 Email: newcastle@biosis.com.au

Sydney

Phone: (02) 9101 8700 Email: sydney@biosis.com.au

Wollongong

Phone: (02) 4201 1090

Email: wollongong@biosis.com.au

VICTORIA

Ballarat

Phone: (03) 5304 4250 Email: <u>ballarat@biosis.com.au</u>

Melbourne (Head Office)

Phone: (03) 8686 4800 Fax: (03) 9646 9242

Email: melbourne@biosis.com.au

Wangaratta

Phone: (03) 5721 9453

Email: wangaratta@biosis.com.au

Document information

Report to: GE Renewable Energy Onshore Wind - Projects and Services

Prepared by: Ian Smales

Biosis project no.: 26357

File name: 26357.Silverton.WF.BBAMP.Biosis.20180315

Citation: Biosis 2018. Bird & bat adaptive management plan for Silverton Wind Farm. Report for GE Renewable Energy Onshore Wind - Projects and Services. Author: I. Smales, Biosis Pty Ltd, Melbourne. Project no. 26357

Document control

Version	Reviewer	Date issued
Draft version 01		06/11/2017
Draft version 02		10/11/2017
Draft version 03	Client / DPE /OEH	15/11/2017
Draft version 04	Client	27/11/2017
Final version 01	Client	15/03/2018

Acknowledgements

Biosis acknowledges the contribution of the following people and organisations in development of this plan:

- Catherine Powers: GE Renewable Energy Onshore Wind Projects and Services
- Bree Lacey: AGL

This document is and shall remain the property of Biosis Pty Ltd. The document may only be used for the purposes for which it was commissioned and in accordance with the Terms of the Engagement for the commission. Unauthorised use of this document in any form whatsoever is prohibited.

Disclaimer

Biosis Pty Ltd has completed this assessment in accordance with the relevant federal, state and local legislation and current industry best practice. The company accepts no liability for any damages or loss incurred as a result of reliance placed upon the report content or for any purpose other than that for which it was intended.

[©] Biosis Pty Ltd



Contents

1	Intro	duction	3
2	Base	eline information	6
3	Sign	ificant impact & trigger levels	10
	3.1	Guiding principles for determining significance of impacts	10
	3.2	Trigger levels for management responses to bird & bat collisions at Silverton Wind Farm	11
4	Mon	itoring strikes & effectiveness of impact minimisation	14
	4.1	Monitoring of turbine collisions	14
		4.1.1 Carcass search method	14
		4.1.2 Fall zone and estimation for unsearchable zones	14
		4.1.3 Turbines to be searched	15
		4.1.4 Search duration and frequency	15
		4.1.5 Carcass & data collection & management	16
		4.1.6 Carcass persistence trials	19
		4.1.7 Searcher efficiency trials	20
		4.1.8 Incidental finds of bird and bat carcasses	21
	4.2	Analyses of results	22
	4.3	Reporting	24
	4.4	Injured birds and bats	24
5	Man	agement to minimise impacts on birds and bats	27
	5.1	Turbine locations relative to raptor nests	27
	5.2	Minimising raptor perch sites	27
	5.3	Large animal carcass removal	28
	5.4	Pest animal control	30
	5.5	Deterrence of bats from turbines	31
	5.6	Adaptive management of turbines to reduce collisions	31
Refe	rence	s	33
Appe	endice	9S	35
	Арр	endix 1: Turbine mortality survey data sheet	35
		endix 2: Dead or injured bird / bat data sheet	
		endix 3. Carcass persistence trial: carcass deployment data sheet	
		endix 4: Consolidated Bird Observation Map	
		endix 5: Consolidated Bat Observation Map	
	• •	endix 6: Bird and Bat Survey Methods	



1 Introduction

This Bird and Bat Adaptive Management Plan (BBAMP) for Silverton Wind Farm has been prepared in response to items in condition 17 and 19 of schedule 3 of the third modification of the project approval ('condition 17 and 19 of schedule 3 of the MOD 3 project approval') which was issued by the Planning Assessment Commission of NSW on the 22 December 2016 as well as the Statement of Commitments and Section 9.3 of the Environmental Assessment Main Report Part 2 undertaken by NGH Environmental in 2008. The relevant details of condition 17 and 19 of schedule 3 of the MOD 3 project approval are presented in the box below. This BBAMP should be read in conjunction with the Operations Environmental Management Plan (OEMP) which forms part of a set of documents known as the Service Plans.

Condition 17 and 19 of schedule 3 of the MOD 3 project approval is as follows:

Condition 17, Schedule 3

The Proponent must:

(b) ensure wind turbines are located as far as possible, but at least 200 metres, from raptor nests unless the Secretary agrees otherwise;

(e) minimise:

- impacts on the Barrier Range Dragon;
- impacts on threatened bird and bat populations;
- the clearing of native woodland vegetation and fauna habitat, in particular spinifex habitat,
- standing dead trees and woody habitat and high biodiversity value vegetation communities;

Condition 19, Schedule 3

Prior to the construction of any wind turbines, the Proponent must prepare a Bird and Bat Adaptive Management Plan for the project in consultation with OEH to the satisfaction of the Secretary. This program must include:

(a) baseline data on threatened and 'at risk' bird and bat species and populations in the locality that could potentially be affected by the project;

(b) a detailed description of the measures that would be implemented on site for minimising bird and bat strike during the project, including:

- locating turbines as far as possible away from any raptor nests;
- minimising the availability of raptor perches;
- prompt carcass removal;
- · controlling pests;
- using best practice methods for bat deterrence; and
- adaptive management of turbines to reduce mortality; and

(c) trigger levels for further investigation of the potential impacts of the project on particular bird or bat species or populations, and the potential implementation of measures to enhance or protect these species or populations in the locality; and

(d) a detailed program to monitor and report on the effectiveness of these measures, and any bird or bat strikes on site.

Following the Secretary's approval, the Proponent must implement the Bird and Bat Adaptive Management Plan, and incorporate it into the Biodiversity Management Plan.

[OEH = Office of Environment and Heritage]



This plan is set out to meet the requirements of the conditions as follows:

- Section 2 is provided to meet requirements of Condition 19 of schedule 3 of the MOD 3 (a)
- **Section 3** is provided to meet requirements of Condition 17 b) and Condition 19 of schedule 3 of the MOD 3 (b)
- **Section 4** is provided to meet requirements of Condition 19 of schedule 3 of the MOD 3 (c) re trigger levels for potential impacts
- Section 5 is provided to meet requirements of Condition 19 of schedule 3 of the MOD 3 (d)
- **Section 6** is provided to meet requirements of Condition 19 of schedule 3 of the MOD 3 (c) re potential measures to enhance or protect relevant species.

GE Renewable Energy Onshore Wind – Projects and Services will contract a Certified Environmental Practitioner (contract qualified ecologist) to oversee implementation of this plan.

In its response to conditions 17 and 19 of schedule 3 of the MOD 3 project approval, the BBAMP also address SOC55 (previously SOC46) in the updated Statement of Commitments.

SOC55 (SOC46) Design and implement an adaptive management monitoring program to document bird and bat mortalities, remove carcasses and assess the effectiveness of controls. If the results of assessment demonstrate that further mitigation is required, further turbine ridge habitat modification and enhancement of off-site habitats would be undertaken.

In its response to conditions 17 and 19 of schedule 3 of the MOD 3 project approval, the BBAMP also addresses Section 9.3 of the Environmental Assessment – Main Report – Part 2.

9.3 MONITORING AND ADAPTIVE MANAGEMENT

Monitoring and adaptive management mechanisms will be in place to reduce the operational impacts of the Proposal, should unforeseen impacts result. The Proposal has a degree of flexibility to address unforeseen impacts. Specific management responses will be determined by the nature and extent of impacts, but could include adjustments to the turbines and associated infrastructure or to offsite areas; for example, to install visual screening offsite or habitat enhancement away from turbine locations.

The CEMP and OEMP will employ adaptive management in response to monitoring results and other inputs. Due to the level of detail and site specific investigation required, monitoring programs will not be designed prior to project consent.

However, an indicative program is outlined below to assess the impact of the operational Proposal on birds and bats.

9.3.1 Example: bird and bat impact monitoring

Monitoring methods and data standards for dead bird searches, indirect disturbance impact assessment and habitat avoidance studies will be based on protocols in the Interim Standards for Assessing the Risks to Birds from Wind Farms in Australia (Brett Lane and Associates 2005).

In the case of bird and bat mortality, threshold mortality rates for threatened or sensitive bird and bat species would be determined for three monitoring periods (first six months, first two years, ongoing). The thresholds will trigger a management response, which will vary depending on the nature and extent of the impact.

The OEMP will contain details of a three-tiered monitoring program for bird and bat mortalities and habitat utilisation impacts:

1. First six months of operation

- An intensive period of monitoring required because birds and bats are in the process of habituating to the new



development, and sensitive species may experience higher levels of mortality during this period

- During this period all turbine sites will be surveyed to determine variation in impact over the study area. Surveys may include monthly dead bird searches, bird utilisation surveys, observation of avoidance/diversion behaviour and targeted surveys for species of concern (such as raptors)
- Reporting will examine the impacts on potentially vulnerable species (such as threatened species, waterbirds and raptors)
- 2. First two years of operation
- Monitoring to assess mortality rates and trends over several seasons and longer term changes to local species abundance, habitat use patterns and possibly breeding success, directed by the results of previous monitoring
- The surveys may be limited to representative or higher risk turbine sites, based on the results of previous monitoring.
- Reporting will examine the impacts on potentially vulnerable species (such as threatened species, waterbirds and raptors)
- 3. Ongoing monitoring
- Mortality inspection and reporting to be continued for the life of the wind farm, at intervals determined by the results of previous monitoring. The inspection regime may be linked to turbine inspection and maintenance cycles.

Mortalities of any significant species will be reported to DECC.

[DECC: Department of Environment and Climate Change]



2 Baseline information

Information in this section is provided to meet requirements of Condition 19 of schedule 3 of the MOD 3 (a).

Pre-construction surveys for birds and bats at the site of Silverton Wind Farm were undertaken in accordance with Survey guidelines for Australia's threatened birds. Guidelines for detecting birds listed as threatened under the Environment Protection and Biodiversity Conservation Act 1999 (Commonwealth of Australia 2010a) and Survey guidelines for Australia's threatened bats. Guidelines for detecting bats listed as threatened under the Environment Protection and Biodiversity Conservation Act 1999 (Commonwealth of Australia 2010b). As noted in those guidelines, the surveys were designed to determine presence or the probability of presence of various species. They were not designed to establish or assess species abundance or other measures such as quantified flight rates of different species.

Raptor nest mapping and bat observations identified in the below studies undertaken by NGH Environmental have been consolidated and identified in the maps at Appendix 4 and Appendix 5.

- Environmental Assessment Biodiversity Assessment (dated March 2008)
- Baseline bird surveys pre-construction:
- Spring / Summer Study 2016
- Autumn / Winter Study 2017
- Spring Study 2017

The Proponent is undertaking further baseline studies at the direction of OEH in autumn of 2018. The methods used for all surveys are set out in Appendix 6. Results of these further surveys augment results of previous baseline studies. The cumulative results will be incorporated into the adaptive framework for management of the wind farm, particularly if they demonstrate that new risks exist or indicate that additional species are at risk or that the risk profile for any species should be altered.

Bat calls were recorded by NGH Environmental (2016) using automated bat call detectors. The principal objective of that work was to determine the composition of the local bat fauna. Species abundance or flight frequencies cannot be determined from bat calls because there is no known correlation between bat calls and bat activity. Further, as noted by Law *et al.* (2015), natural and sampling variability in detected bat calls tends to be very high with night-to-night variation due to minor weather variables alone being a substantial variable.

Pennay (2017) recommended the inclusion of two additional species of threatened bats in the assessment because it is possible that they might occur at the site of Silverton Wind Farm. They are Corben's Long-eared Bat *Nyctophilus corbeni* and Bristle-faced Freetail Bat *Mormopterus eleryi*.

Ecology and Heritage Partners (undated maps) have documented a small number of additional threatened passerine birds from the site and its environs.

Investigations of the presence and locations of bird and bat species at Silverton Wind Farm site have been established as a Before-After-Control-Impact (BACI) design. It is important that bird and bat surveys continue once the wind farm becomes operational and that the survey methods used prior to construction are continued unaltered. The survey and study methods are set out in Appendix 6. Surveys prior to construction of the facility include Before and Control components. Studies after commissioning of the wind farm provide After, Control and Impact components. The BACI design is intended to be able to measure changes that may result from operation of the wind farm. Annual reviews of the results of the BACI studies will be used to refine the adaptive framework of this BBAMP for management of the wind farm.



The NGH surveys for birds and bats have been undertaken at a series of point locations that provide a sample of habitats and environments for birds and bats. Hence, the results they provide are point locations at which relevant species were detected. As such, their results do not have capacity to identify particular turbines that might be associated with greater or lesser risk to any species. We note, too that the international and Australian literature includes a number of studies of raptors that have demonstrated that presence and even rates of utilisation are poor predictors of collision risk (Madders & Whitfield 2006; de Lucas *et al.* 2008; Ferrer *et al.* 2012; Hull et al. 2013).

NGH Environmental (2016) provided methods and qualitative assessment of risk for listed threatened and migratory species of birds and bats known from the site and its environs. They included Rainbow Bee-eater as a species listed as migratory under the EPBC Act. It is no longer listed under that provision of the Act.

NGH Environmental (2016) also applied the risk assessment to additional species of raptors and some bats that are not threatened. Risk assessment for these additional species was undertaken particularly because it is considered that their flight behaviours may put them at a greater risk of collisions than most other taxa.

NGH Environmental (2016) developed and applied a risk matrix for individual species of birds and bats that incorporates probability that the wind farm might alienate birds or bats from habitats at the wind farm and the likelihood that particular species might collide with turbines. Risks were ranked as Low; Medium or High on the basis of a set of defined likelihood and consequence factors. The risk assessment applied by NGH Environmental (2016) indicates that collision or barotrauma due to interaction by birds or bats with turbines represents a greater risk than does the possibility that the wind farm might alienate birds or bats from their habitats or that it might present a barrier to their movements. Empirical evidence from operational wind farms in Australia supports this approach, as collisions by some species certainly occur, but there is no known documentary evidence for wind farm infrastructure resulting in alienation of Australian species of birds or bats. For that reason, this Plan is substantially concentrated on management to reduce effects of turbine collisions.

It is important to note that the assessment of turbine collision risk relates to the probability that particular species may collide with turbines. It is not an indication of the likelihood that collisions might represent a significant impact on the population of any species.

The risk matrix used by NGH (2016), with three risk levels: Low, Moderate and High, assigned based on the likelihood, is replicated as Table 1, below.

Table 1 Risk matrix [from NGH (2016)]

Likelihood	Consequence						
	Insignificant	Minor	Moderate	Significant			
Rare	Low	Low	Moderate	High			
Unlikely	Low	Low	Moderate	High			
Possible	Low	Moderate	High	High			
Probable	Moderate	High	High	High			

Descriptions of likelihood and consequence factors for birds and bats, as used by NGH (2016), are set out in Table 2.



Table 2 Likelihood and consequence descriptors used in the NGH risk matrix

Likelihood	Description	Consequence	Description
Rare	An impact may occur only in unusual circumstances	Insignificant	Impact on species not detectable in the short term
Unlikely	An impact might occur at some time	Minor	Impact may cause non- significant changes to local abundance of some species
Possible	An impact could occur during most circumstances	Moderate	Impacts may cause significant changes to local abundance of species
Probable	An impact is expected to occur in most circumstances	Significant	Impacts may be significant at a population scale

Table 3 uses the NGH Environmental (2016) collision risk assessment applied to listed threatened and migratory bird and bat species, including species from all sources noted above, that are considered to have potential to use the site and to the non-threatened species included in the assessment of NGH Environmental (2016).

The risk assessment is qualitative (i.e. it is not quantitative in the manner of mathematical collision-risk modelling) and is indicative about potential risk for particular taxa. It has been used to determine three categories of taxa that are considered to be at a level of risk (listed species, non-threatened raptor species; and other non-threatened species) during operation of the wind farm. For this reason, the triggers in this BBAMP apply to *any* taxa in those categories regardless of current predictions of risk.

This BBAMP is applicable to all the taxa listed in Table 3. It also applies to any species subsequently found to occur at the site and that are listed as:

- threatened or migratory under provisions of the EPBC Act, or,
- threatened on schedules of the NSW Biodiversity Conservation Act 2016.

For the purpose of this plan, these are collectively termed 'species of interest'.

Table 3 Qualitative assessment of turbine collision risk for birds & bats at Silverton Wind Farm

EPBC = Environment Protection & Biodiversity Conservation Act 1999; BAC = Biodiversity Conservation Act 2016

Species		Conservation status	Collision risk
Birds			
Freckled Duck	Stictonetta naevosa	Vulnerable BCA	Low
Black Kite	Milvus migrans		High
Square-tailed Kite	Lophoictinia isura		High
Black-breasted Buzzard	Hamirostra melanosternon	Vulnerable BCA	High
Collared Sparrowhawk	Accipiter cirrocephalus		Low
Little Eagle	Hieraaetus morphnoides	Vulnerable BCA	High



Species		Conservation status	Collision risk
Wedge-tailed Eagle	Aquila audax		High
Spotted Harrier	Circus assimilis	Vulnerable BCA	High
Brown Falcon	Falco berigora		High
Nankeen Kestrel	Falco cenchroides		Moderate
Grey Falcon	Falco hypoleucos	Endangered BCA	Moderate
Pink Cockatoo	Lophocroa leadbeateri	Vulnerable BCA	Low
White-throated Needletail	Hirundapus caudacutus	Migratory EPBC	Moderate
Rufous Fieldwren	Calamanthus campestris	Vulnerable BCA	Low
Redthroat	Pyrrholaemus brunneus	Vulnerable BCA	Low
Pied Honeyeater	Certhionyx variegatus	Vulnerable BCA	Moderate
Painted Honeyeater	Grantiella picta	Vulnerable BCA	Moderate
White-fronted Chat	Epthianura albifrons	Vulnerable BCA	Low
Hooded Robin (SE form)	Melanodryas cucullata	Vulnerable BCA	Low
Varied Sittella	Daphoenositta chrysoptera	Vulnerable BCA	Low
Dusky Woodswallow	Artamus cyanopterus	Vulnerable BCA	Low
Diamond Firetail	Stagonopleura guttata	Vulnerable BCA	Low
Bats			
Yellow-bellied Sheathtail Bat	Saccolaimus flaviventris	Vulnerable BCA	High
Gould's Wattled Bat	Chalinolobus gouldii		High
Little Pied Bat	Chalinolobus picatus	Vulnerable BCA	High
Corben's Long-eared Bat	Nyctophilus corbeni	Vulnerable EPBC & BCA	Moderate
Inland Forest Bat	Vespadelus baverstocki	Vulnerable BCA	Moderate
Bristle-faced Freetail Bat	Mormopterus eleryi	Endangered BCA	High
White-striped Freetail Bat	Tadarida australis		High



3 Significant impact & trigger levels

Information in this section is provided to meet requirements of Condition 19 of schedule 3 of the MOD 3 (c) in relation to trigger levels for potential impacts.

3.1 Guiding principles for determining significance of impacts

While the most desirable outcome for Silverton Wind Farm is that it will operate without any negative effect on birds and bats, it is recognised that some impact is likely to occur.

The overarching objective will be that the wind farm does not have a significant impact on the viability of the population of any species. It is worth noting that density dependence is an important ecological concept of relevance for consideration of effects on viability of wildlife populations. In essence, the size of any natural population is regulated by availability of resources to support it. This will include food, breeding sites, roost sites, mating opportunities, etc. all of which in combination represent 'habitat' for the species in question. Where an impact removes habitat the population will be reduced as a direct consequence. However, where the key resources for the species are not reduced and the population is otherwise stable, the mortality of one individual makes resources available to another whose survival prospects are improved and the net result is that the size of the population is not altered. Construction and operation of Silverton Wind Farm will have little impact on resource availability for most species of birds and bats and mortalities due to turbine collisions can be expected to function in accordance with density dependence with little influence on the equilibrium of affected populations.

Various guidelines published by the Commonwealth for application of the EPBC Act offer some principles of value in consideration of impacts on populations. Significant impact guidelines for threatened and migratory species listed under the EPBC Act are contained in *Matters of National Environmental Significance: Significant impact guidelines 1.1 Environment Protection and Biodiversity Conservation Act 1999* (Commonwealth of Australia 2013), which also provides criteria for what might constitute a 'significant impact'. However, the criteria are not quantifiable in numbers of individual animals and only two of the species of interest for Silverton Wind Farm are listed under the EPBC Act.

The EPBC Act Policy Statement 2.3 Wind Farm Industry (Commonwealth of Australia 2009) provides some further explanation and examples relative to potential effects of the wind industry. The following excerpt is useful in its indication that the risk should be considered as proportional to the population size of particular species:

"An activity that affects, or is likely to affect, a small number of individuals usually would not be expected to have a significant impact on the species as a whole. However, when a species or community is in small numbers nationally, or its distribution or habitat is limited, or if the habitat has particular importance for the species, the activity could have a significant impact. In general, this would apply to species or communities that are most at risk of extinction and are, as such, listed as critically endangered or endangered.

An action is likely to have a significant impact on a species listed as vulnerable where it significantly affects an important population of that species. An example might be where a wind farm is proposed on an island or headland, or near a wetland, that has a key breeding population of a bird species listed as vulnerable. The breeding frequency and success rate for that species would also be relevant considerations."

None of the species of interest at Silverton Wind Farm are covered by *Draft referral guideline for 14 birds listed as migratory species under the EPBC Act* (Commonwealth of Australia 2015a), nonetheless it is provides further



guidance in that it considers that a significant impact would entail mortalities equalling or exceeding 1% of the population of a species and that further investigation would be required if it equalled or exceeds 0.1% of the population.

The Commonwealth guidance documents clearly indicate that the level of impact that may be significant is based on the measure of change that may be experienced by the population of a threatened or migratory species. This 'population' approach is ecologically meaningful as it responds appropriately to the population sizes of different species. Ideally, it would be possible to consider a number of turbine collision mortalities for a particular species as a proportion of its entire population and determine numbers and frequency of collisions that would warrant management response(s) according to whether they represent an ecologically important influence on the population's viability (Smales 2017). That approach requires good estimates for the population sizes of relevant species. However, accurate population estimates are not available for any of the species of interest for Silverton Wind Farm. While it is not feasible to use precise percentages of population size as a mechanism to determine numbers of mortalities that might represent a level of significant impact on the species of interest at Silverton wind Farm, informed professional judgement about the relevant species strongly suggests that a significant impact in which mortalities equal or exceed 1% of the population of any such species would be likely to entail deaths of many tens or hundreds of individuals.

At present there is little published information about rates of bird and bat fatalities at Australian wind farms. The only published peer-review information is from two Tasmanian wind farms with a combined total of 62 turbines that were monitored for different periods but over a total span of eight years (Hull *et al.* 2013; Hull & Cawthen 2013). They detected 245 bird carcasses and 54 bat carcasses during a total of 12,908 searches. It is important to note that due to sampling methods their detection rates do not equate to total numbers of collision fatalities that may have occurred. Nonetheless, extrapolating from their samples it appears unlikely that total collision fatalities represent significant impacts on the population viability of any species.

It is considered to be extremely unlikely that bird and bat fatalities due to collisions by any species at Silverton Wind Farm will be sufficient to represent a significant impact on the species overall population (e.g. to equal or exceeding 1% of the population of any species

Baseline and post-construction studies of birds and bats at Silverton Wind Farm are aimed at detecting changes in distribution, abundance and activity (collectively termed 'utilisation') of these groups. Multiple variables external to operation of the wind farm, including land management practices, weather and climate are all likely to affect the local utilisation by birds and bats and the levels of collision mortalities of this fauna at other large wind energy facilities in Australia suggests that they are routinely too low and rare to be detectable by utilisation studies. For that reason, the discussion below about trigger levels for management response(s) at Silverton Wind Farm are defined by numbers of mortalities that may be actually detected by carcass searches, rather than by the indirect measures obtainable from utilisation studies.

3.2 Trigger levels for management responses to bird & bat collisions at Silverton Wind Farm

In the absence of population estimates for bird and bat species at Silverton Wind Farm, it is necessary to determine levels of collision mortality that represent levels that will trigger management responses measured by numbers of detected bird and bat collisions with turbines. As outlined above, the significance of any collision mortalities that may occur will differ according to the abundance and population dynamics, as well as the level of threat, for various taxa. Collision mortalities that might occur for any given species can be expected to fall into one of two levels depending upon the number and frequency at which they occur:



- 1. The number of collisions per annum is low and is unlikely to have any meaningful ecological effect on the local population
- 2. The number of collisions per annum represents a low, but uncertain potential to result in a negative effect on the local population

If the number and frequency of any detected collision mortalities is low and is unlikely to have any meaningful ecological effect on the local population (i.e. it does not exceed level 1, above), no action is required.

Triggers for responsive management actions will apply where the number of collisions per annum represents a low, but uncertain potential to result in a negative effect on the local population (level 2, above). The response is thus precautionary as it will be implemented at levels substantially below numbers of fatalities that are considered likely to represent a significant impact on the viability of the overall population of any species.

Defined trigger levels are set out below. For consistency, trigger levels are similar to those that have been adopted in other recently approved BBAMPs for wind energy in N.S.W. (e.g. White Rock Wind Farm (Brett Lane & Associates 2017)). The levels will be used, if required, as triggers for implementation of adaptive management aimed at reducing impacts to a level below the set trigger levels.

Trigger levels are for numbers of bird and bat fatalities detected during carcass searches (see Section 5, below). It is important to note that the number of fatalities detected by searches will almost certainly not represent the total number of animals killed because searches rarely detect all carcasses and because some carcasses will be removed by scavengers before they can be found. These effects are well known and there is an existing science for determining estimates of total mortalities from numbers of mortalities detected during searches (e.g. Huso *et al.* 2017). While estimation of total numbers of collision fatalities is important and will be undertaken for Silverton Wind Farm, the small numbers of collisions that generally occur at wind farms in Australia most often result in estimates of total mortality with very large confidence intervals (usually using 95% C. I.). For that reason, extrapolated estimates of total mortality do not provide a sound basis for use as trigger levels.

NGH Environmental (2016) allocated predicted risk of collisions for a range of bird and bat species, primarily for threatened species, but also including all raptors and some non-threatened taxa believed to be at high risk. That information, updated to include some additional species, is replicated as Table 3 (Section 2) of the current plan. Experience at the operational wind farm will tell whether additional species are at risk of collisions. Trigger levels are set here for three groups of species according to their differing conservation status and their relative natural abundance. The trigger levels will apply for all taxa that may use the site, regardless of whether they are included in Table 3, and for any species that are listed as threatened in future. For the purposes of this plan the following trigger levels will apply:

Listed threatened species

A trigger-level impact will occur where more than two carcasses or featherspots of a single threatened species are detected during carcasses searches in any two consecutive months.

Non-threatened raptor species

A trigger-level impact will occur where more than three carcasses or featherspots of a single non-threatened raptor species are detected during carcasses searches in any two consecutive months.



Other non-threatened species (including species listed as migratory but not threatened)

A trigger-level impact will occur where more than four carcasses or featherspots of a single non-threatened species are detected during carcasses searches in any two consecutive months.

In line with other approved BBAMPs in N.S.W., trigger levels will not apply to any introduced species.

The decision-making process shown in Figure 1 will be implemented where a trigger-level has been reached for a threatened species.

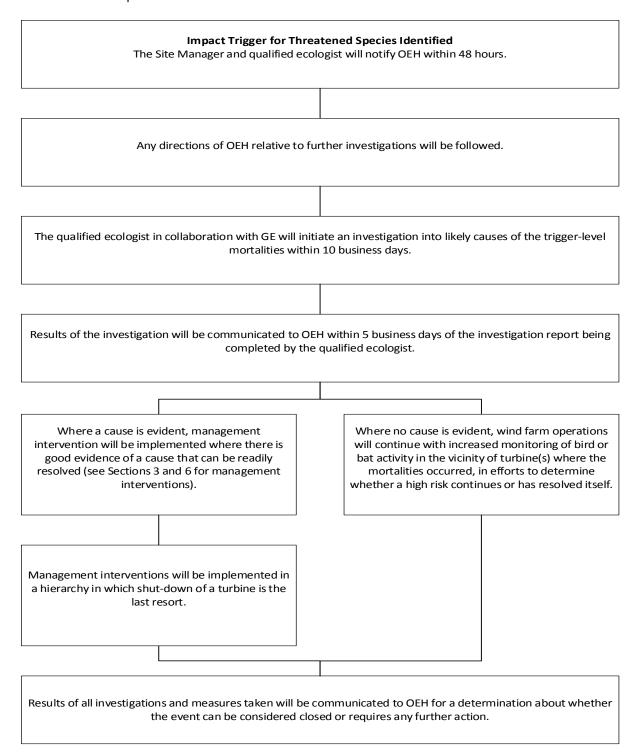


Figure 1 Measures to be implemented in the event of reaching a trigger-level



4 Monitoring strikes & effectiveness of impact minimisation

Information in this section is provided to meet requirements of Condition 19 of schedule 3 of the MOD 3 (d).

Assessment against trigger levels will require a program for monitoring collisions in a sample of years. This will entail a regime of searches for dead birds and bats under turbines.

The following important principles have guided the design of studies described here:

- To the extent possible, they should be simple and minimise extraneous variables.
- In order to maximise their potential to meet stated objectives, they should obtain the largest sample sizes that are practicable.
- They must be able to be implemented without significantly compromising the routine operation and management of the wind farm.

The monitoring program set out here is designed to provide information about trigger levels and to inform estimates of total annual numbers of collisions, with associated confidence intervals, for all bird and bat species of interest.

4.1 Monitoring of turbine collisions

4.1.1 Carcass search method

Purpose-trained dogs have been shown to be highly efficient at detecting carcasses (Mathews *et al.* 2013) and have been used for this purpose at a number of wind farms in in Australia. Using purpose-trained dogs obviates the need for formal transects to be established in the search zones as dogs use scent to detect carcasses and are permitted to roam to do so. Every dog will be fitted with a GPS tracking device while undertaking searches. GPS tracks will be downloaded and maintained for future reference and used for analyses of search effort and coverage. GIS maps showing routes taken by dogs will be made available to OEH on request. The use of trained dogs is the preferred method for searches and will be used, provided appropriately trained dogs and handlers are available. Dog handler(s) must have demonstrated capacity to identify bird and bat species of western NSW.

However, if the use of dogs is not practicable at the Silverton site the alternative is to use people. Human observers will search by walking transects through the search zones. Searches by people will be undertaken by ecologists with demonstrated capacity to identify bird and bat species of western NSW. Transects will be spaced 6 metres apart, or as near to 6 metres as is practical and observers will thus search the ground for 3 metres either side of each transect. Each observer will carry a hand-held GPS unit and record transects they walk. GPS tracks will be downloaded and maintained for future reference and used for analyses of search effort and coverage. GIS maps showing transects walked will be made available to OEH on request.

4.1.2 Fall zone and estimation for unsearchable zones

Hull and Muir (2010) provide the sizes of likely fall zones for different turbines and sizes of birds and bats based on ballistics theory. They note that distance from the base of a turbine is an important factor in dispersion of carcasses and that with increased distance the density of carcasses decreases. They provide modelled fall zones and radii for percentages of expected distribution for two size classes of birds and one for small bats. Huso and Dalthorp (2014) compared five estimators for the relationship of carcass density to distance from modern wind turbines. For all five estimators tested they found that density approached zero at about 70 metres horizontal distance from the turbine base.



The greatest capacity to detect carcasses is obtained from intensive searches of defined areas of the potential fall zones and the most valid estimates of mortality come from distance-based carcass-density models (Huso and Dalthorp 2014). Because the densities of carcasses diminish with horizontal distance from a turbine, searching of large areas including the outer extremities of potential fall zones were shown by those authors to add little to detection rates but to add very substantially and disproportionally to search effort. Hence, intensive searches of the portion of the fall zone in which the majority of carcasses will be found are the most effective and appropriate. The great majority of birds and bats that may be involved in turbine collisions at Silverton Wind Farm are expected to be found within a radius of 70 metres of the bases of turbines.

The immediate areas around many turbines at Silverton Wind Farm include drop-offs and highly dissected rocky ground. Searches of the entire 70 metre radius under turbines by people or by handlers and dogs would entail substantial occupational health and safety risks. This is common to many wind farms internationally and Huso and Dalthorp (2014) and Huso et al. (2017) provide sound methodology for extrapolation from areas under turbines that are able to be searched safely. Each turbine at Silverton Wind Farm has an approach road and a hardstand of approximately 2300 square metres area. These clear areas will be readily searchable and searching them under all turbines in a given search regime (see 5.1.3, below) will introduce a uniformity to the search regime that would not otherwise be available. Therefore the search program will be confined to coverage of these clear areas out to a distance of 70 metres from the base of each turbine. Under the majority of turbines the access road passes alongside the turbine and the searchable zone will thus extend out to a 70-metre distance in two directions along the road. Where a turbine is situated at the end of a road, the 70-metre distance will extend only along that distance of the approach road. The extent of the 70-metre radius from the base of each turbine will be permanently marked on relevant roadsides. Current peer-review methods will be used to extrapolate from the numbers of carcasses detected within the defined searchable areas under turbines to provide an estimate of the number of carcasses likely to have fallen within the entire fall-zone under each turbine.

4.1.3 Turbines to be searched

Searches will be undertaken at all 58 turbines during the first six months of the program. Subsequently, and in order to maximise capacity to provide statistically meaningful sample sizes and because collisions with turbines are likely to be infrequent events for the species of interest, carcass searching will be carried out under half of the total complement of 58 turbines. The selected 29 turbines will be searched over two consecutive months, 15 in one month, 14 the next and these will be allocated proportional to the total number of turbines situated within different vegetation zones, but otherwise will be selected at random. This may be varied if searches during the initial six months indicate that particular turbines represent significantly higher risk than others. Pre-construction bird surveys do not provide data sufficient to indicate 'higher-risk' zones but if searches during the initial six months do indicate higher risk associated with particular turbines, then such turbines will preferentially be included in the selection of turbines for on-going monitoring. The selection of turbines to be searched will be made at completion of the first six months of monitoring and will then be used throughout the remainder of the study.

4.1.4 Search duration and frequency

The regime of carcass searching will run for two years and will commence when all turbines are commissioned and become operational at the wind farm. At the completion of the first year of the monitoring program results will be collated and an interim report will be prepared. The results will be provided to OEH and in collaboration with OEH a determination will be made about any changes to search duration and/or frequency that might be made to improve effectiveness of the monitoring program. At the conclusion of the two year program and after analyses of results, a review will be undertaken in collaboration with OEH to determine whether any further monitoring is warranted.

It is likely (but uncertain at present) that carcasses of bats and small birds will be scavenged quickly at the site. Carcass persistence trials will be undertaken during the course of the study (see below), particularly to inform



analyses required to extrapolate from numbers of carcasses detected to estimate total number of collisions. In order for the search regime to accommodate the likelihood of rapid scavenging, a relatively short period between initial searches is important.

A primary purpose of the search regime is to ascertain the frequency at which collisions occur. This is necessary for use in extrapolation to estimate total fatality rates. A three-day interval between two searches in each search cycle is designed to provide good capacity to determine frequency of collisions, because there is a high probability that a carcass found on day four must have collided in the preceding three days.

In each month when a turbine is to be searched, one search will be undertaken followed by a second search three days later. The frequency of carcass searches may be altered from the regime set out here if results of carcass persistence trials (see Section 5.1.6, below) indicate the value of doing so. The regime may be altered only if approval is first obtained from OEH.

4.1.5 Carcass & data collection & management

During all searches, all species of birds and bats detected as carcasses or as bird featherspots, will be recorded on a data pro forma designed for the purpose (see Appendices). Ideally, data will be collected onsite using electronic tablets which will maximize efficiency in data management. A featherspot is any collection of ten or more feathers found grouped together in a manner that suggests a bird has died at the location. All information, including metadata for each turbine search will also be recorded irrespective of whether a carcass is found during a given search. All data will be entered into a single (backed-up) database to be maintained by the wind farm operator. Raw data will be available to relevant regulatory authorities on request.

On finding a carcass, it will be photographed in situ and its location will be logged using a portable GPS device. Carcasses of all taxa, whether species of interest or not, will be collected, labelled with relevant data details and frozen to permit any necessary investigations of cause of death and/or for use in future searcher efficiency or persistence trials. A freezer for this purpose will be available on-site. At the conclusion of the overall investigation, all specimens will be made available to the Australian Museum.

Retrieved carcasses of common species may be used later for scavenger trials and as the presence of human scent may influence scavenging rates, it is best to avoid direct human contact. Therefore, to avoid human scent being imparted to a carcass, and for health and safety reasons, gloves must be worn when handling bird and bat carcasses.

Table 4 Turbine carcass search regime

Action	Timing /Frequency	Adaptive Management	Reporting	Responsible Party	Objective	Measure
Engage dog- handler or human observer team(s) with experience at undertaking carcass searches at wind farms.	Prior to the commissionin g of the wind farm; ongoing	Use human observers where a dog handler team is not available	Provide the company details and names of contractors to OEH	GE & contracted qualified ecologist	Determine the best method for conducting carcass searches in the Silverton Wind Farm environment	Demonstrate consideration of both dog handler or human observer search options



Action	Timing /Frequency	Adaptive Management	Reporting	Responsible Party	Objective	Measure
Train dog- handler / human observer teams on how to undertake the carcass searches and collect the requisite information	Prior to the commissionin g of the wind farm; ongoing	N/A	N/A	GE & contracted qualified ecologist	Ensure the search team is inducted and qualified to conduct carcass searches in the Silverton Wind Farm environment	Record the date of induction
Undertake turbine collision carcass searches at 29 turbines (15 turbines in one month, 14 turbines in the next month) using a dog-handler team or human observers	Over two- month cycle. In each month when a turbine is to be searched, one search will be undertaken followed by a second search three days later. Commencing post- construction and at commissionin g of all wind turbines. Operating for two years	Use human observers where a dog handler team is not available	Carcass search/mortal ity raw data will be provided with annual reports	GE to appoint search team. Qualified ecologist to oversee searches. GE & qualified ecologist to prepare & submit reports	Determine the number of carcasses found. These will be used in conjunction with the results of the carcass persistence trails to determine estimated annual strike rate	Documented number of carcasses detected for each species. Documented search frequency and effort.
Collection, recording, storage & carcass disposal	On discovery of any featherspot or collision carcass	N/A	As above	All personnel who detect carcasses	Reduce the instance of carcasses attracting raptors by disposal or storage of carrion for further investigation	Using turbine mortality data sheet



Action	Timing /Frequency	Adaptive Management	Reporting	Responsible Party	Objective	Measure
Review carcass search regime	After first full year of operation	Refine program if necessary in light of first year results.		GE; contracted qualified ecologist; OEH	Document all findings in annual report and review with OEH and ecologist	Submission of report to OEH
A freezer will be available for the purpose of storing bird and bat carcasses	Prior to the commissionin g of the wind farm and on- going	Freezer must be large enough to accommodate large birds such as eagles	N/A	GE	Allow the Australian Museum the opportunity to conduct an autopsy of the carcasses as required	Corresponde nce with Australia Museum
Apply for a permit under the Biodiversity Conservation Act 2016 to collect and store bird and bat carcasses	Prior to the commissionin g of the wind farm and ongoing	Permit must be updated regularly to include the all searchers, qualified ecologist(s) and wind farm personnel who find carcasses while on site.	Any reporting conditions attached to the permit must be followed	GE; contracted qualified ecologist	Permission to collect and store carcasses in order to reduce the instance of carcasses attracting raptors by disposal or storage of carrion for further investigation and determine strike rates	Timely permit application to OEH under the Biodiversity Conversation Act 2016



Action	Timing /Frequency	Adaptive Management	Reporting	Responsible Party	Objective	Measure
Identify and collect all dead bird and bat carcasses upon discovery and complete data sheets for each carcass collected	During turbine collision carcass searches and for any birds and bats found incidentally by site personnel	Any species that cannot be identified on site will be lodged with the Australian Museum for identification using reference specimens. This may be particularly applicable to feather spots.	A carcass search/mortal ity report will be provided annually to OEH as part of Annual Bird & Bat Management Report	Contracted qualified ecologist	Document all bird and bat carcass discoveries for the purpose of further investigation and to determine whether trigger levels have been reached	Completed turbine mortality data sheets for all collected bird and bat carcasses, logged in the annual report
Appropriately label and store bird and bat carcasses	During turbine collision carcass searches and for any birds and bats found incidentally by site personnel	Specimens must be kept until positively identified to species and be made available for OEH officers on request and be made available to the Australian Museum prior to disposal	Develop a database of carcasses collected on the wind farm site, noting whether they have been retained, disposed of or donation	Contracted qualified ecologist	Allow for species identification, review by OEH and the Australian Museum the opportunity to conduct an autopsy of the carcasses as required prior to disposal	Documented notification corresponden ce to OEH and the Australian Museum

4.1.6 Carcass persistence trials

Carcasses of bird and bats that collide with turbines may be removed by scavengers or will ultimately disappear due to decomposition. Carcass persistence affects the detection of dead bats that collide with turbines and consequently influences estimation of the total number of fatalities for each species.

Trials to determine persistence time of carcasses are required to derive correction factors necessary to estimate total fatalities from the results of the carcass searches. Two persistence trials will be undertaken in each year of the monitoring regime, one in each of spring and autumn.

Remote cameras will be used to record persistence of carcasses placed on-site for the purpose. Carcasses for the trials will be sourced from bird and bat carcasses found at the site or from other local sources, such as roadkills. It is vital that species used are representation of the bird and bat fauna of Silverton Wind Farm. Carcasses used for trials will be individually marked to ensure they are not confused with collision carcasses. Individual marking allows trial carcasses to be identified if they are simply moved by scavengers. Radio-frequency identification (RFID) microchips inserted into carcasses will be used to provide individual identification. Cameras used for the purpose will be set to take a photograph every hour (day and night) and



also when triggered by movement and infrared. This method has been demonstrated in Victoria to be highly efficient and substantially reduces potential influence on scavengers as may occur when human observers visit frequently to check carcasses. Cameras are deployed and left to operate for the duration of the trial and this entails substantially less effort than having people check carcasses daily. Cameras have the additional advantage of recording the precise time of carcass removal and the species of scavenger that removes a carcass. As a result of the precise documentation of the time of carcass removal there is no need to estimate the period of carcass persistence which is required when carcasses are checked only at an intervals of several days. Censored analysis will be required when carcasses persist beyond the trial period (Klein & Moschberger 2003).

The field of view of cameras is limited and scavengers can simply move a carcass out of that view. In order to check for this, each trial will commence approximately one week before the next routine search for carcasses.

In each trial, a total of 10 carcasses of birds and 10 carcasses of bats will be distributed under 20 randomly-chosen turbines across the wind farm. Each trial will be run for up to one month, but cameras will be checked after two weeks to check on their operation and at that point the trial may be terminated if the carcass has been removed or a second carcass may be placed to increase the sample size of the trial.

The results of these trials will permit average carcass persistence times to be determined. The resulting persistence rates will be used in analyses to estimate total numbers of collisions.

Table 5 Carcass persistence trials

Action	Timing /Frequency	Adaptive Management	Reporting	Responsible Party	Objective	Measure
Implement scavenger trials	One trial in each of spring & autumn in each of two years. Each trial to run for 30 days	Scavenger trial may need to be adjusted/ada pted following field trials Alternative carcass substitutes may need to be sourced depending on availability	Collect and maintain all data associated with the persistence trials	Contracted qualified ecologist	To determine the rate that bird and bat carcasses are being scavenged by predators. These will be used in conjunction with the results of the carcass searches in order to calculate the estimated number of collisions	Completed carcass persistence trial data sheets, calculation of average persistence times and estimated total number of collisions

4.1.7 Searcher efficiency trials

Searchers do not routinely find all carcasses, so it is necessary to ascertain the efficiency of searches in order to determine and apply appropriate correction factors for carcasses missed to inform estimation of total collision mortality for species of interest.



The efficiency of each dog or person undertaking searches will be determined by the use of blind trials. Without the prior knowledge of searchers, a known number of bat carcasses will be placed within search plots prior to routine searches. Carcasses will be placed in sufficient numbers, at a range of turbines and over sufficient time to permit the rate of carcass detection to be adequately determined. After the trial the person who placed the carcasses will collect any that has not been detected and document whether any have been scavenged to ensure accuracy of the searcher efficiency trial. The number and type of carcasses found during the searcher efficiency trials will be compared with the known number of and type of carcasses placed under the turbines.

Two searcher efficiency trials will be undertaken for each searcher in each year of the monitoring regime, one in each of spring and autumn.

Carcasses for the trials will be sourced from bird and bat carcasses found at the site or from other local sources such as roadkills. It is vital that species used are representation of the bird and bat fauna of Silverton Wind Farm. Carcasses used for the purpose should be marked to ensure they are not confused with previously undetected collision carcasses, but in a manner that does not draw the attention of the searcher.

At any time that new search personnel or dogs are employed to undertake searches the rate of their detection ability must also evaluated by a searcher efficiency trail as detailed here.

Table 6 Searcher efficiency trials

Action	Timing /Frequency	Adaptive Management	Reporting	Responsible Party	Objective	Measure
Undertake searcher efficiency trials	One trial in each of spring & autumn in each of two years	As required when any new people or dogs are employed for searches	Collect and maintain all data associated with the searcher efficiency trials	Contracted qualified ecologist	Determine the efficiency of searchers in order to confirm the validity of the turbine carcass search regime	Trial dates and findings are recorded and reported in the annual report, and used to assist in the review of the monitoring program

4.1.8 Incidental finds of bird and bat carcasses

It is possible that during the life of the wind farm, birds and bat carcasses will be discovered incidentally by site personnel. Therefore, all site personnel will be trained on procedures for the event in which they encounter dead or injured birds and bats. Upon incidental discovery, carcasses and featherspots must be photographed *in situ*. However, the carcass or featherspot must be left where it was found in order not to introduce bias to detection rates of the official search regime. Any member of the site personnel who finds a carcass of a bird or bat must complete the relevant carcass data sheet (see Appendices). Copies of carcass data sheets must be available on site for use by all site staff.



Table 7 Requirements for the incidental discovery of carcasses

Action	Timing /Frequency	Adaptive Management	Reporting	Responsible Party	Objective	Measure
Training of site personnel on procedures for bird and bat carcasses found incidentally	Prior to the commissionin g of the wind farm and ongoing	N/A	All incidentally found carcasses and featherspots will be reported to OEH as part of Annual Bird & Bat Management Report	All site personnel; contracted qualified ecologist	Site personnel are inducted to understand the procedures regarding carcass discovery and the possible ramifications for not following this procedure	Inductions have been completed for all site personnel and date of attendance has been recorded.
Photography of incidentally encountered bird and bat carcasses; completion of relevant data form	On discovery of any featherspot or collision carcass	N/A	As above	All personnel who incidentally detect carcasses	Ensure detailed data and photos are captured and recorded	Completed dead or injured bird/bat data sheet, also recorded in the annual report

4.2 Analyses of results

Trigger levels for all species of interest will be determined directly from results of collision mortality searches.

Estimates of the annual total number of collision mortalities for all species of interest will be undertaken using current best-practice science to account for searched areas; carcass persistence times and searcher efficiency rates. Along with the estimates, 95% confidence intervals will be determined as a measure of variance around the estimates. Current best-practice (2017) for these analyses are provided by Huso *et al.* (2017) (see also Huso and Dalthorp 2014; and Dalthorp *et al.* 2017). The analyses will be undertaken by a biometrician with a thorough understanding of the relevant science. In Australia, Symbolix Pty Ltd has developed relevant mathematical algorithms and has experience in provision of appropriate analyses.

A report, including results and analyses, for each of the two years of the study will be prepared and provided to OEH using the below calculation.

Trigger levels will be quantified as the (1) mean number of detected strikes per species per turbine per annum and (2) total estimated number of strikes per species per turbine per annum, with 95% confidence interval. Values for (2) calculated using all the necessary factors such as proportion of turbines searched; portion of fall-zones searched, search frequency; average carcass persistence time; searcher efficiency rates etc.



Table 8 Analyses of results

Action	Timing /Frequency	Adaptive Management	Reporting	Responsible Party	Objective	Measure
Determine collision results relative to trigger levels	Following each search cycle	N/A	Report to OEH within 2 working days if a trigger level for any threatened species is reached	GE; contracted qualified ecologist	Determine whether a trigger level has been reached, and if so initiate the Decision Making Framework process at Figure 1	Results exceeded trigger levels have been reported to OEH within 48 hours Other results have been reported within 10 business days
Calculate mean rates of searcher efficiency and carcass persistence, relevant for all species of interest	Within 3 months of the completion of monitoring, including trials for the year, in year of the monitoring program	N/A	Provide as inputs to subsequent analyses	Contracted qualified ecologist; statistician to analyze data	Determine mean searcher efficiency and carcass persistence rates for use in calculations of overall collision estimates	Results have been reported to OEH within 10 business days



Action	Timing /Frequency	Adaptive Management	Reporting	Responsible Party	Objective	Measure
Use mean scavenge and searcher efficiency rates in combination with the results of mortality searches to estimate total mortality of all species of interest detected in carcass searches at the wind farm, along with associated 95% confidence intervals.	Within 3 months of the completion of monitoring, including trials for the year, in year of the monitoring program	N/A	Results to be provided to OEH in Annual Bird & Bat Management Report	GE; contracted qualified ecologist	Determine whether a trigger level has been reached, and if so initiate the Decision Making Framework process at Figure 1	Results exceeded trigger levels have been reported to OEH within 48 hours Other results have been reported within 10 business days

4.3 Reporting

Requirements for reporting of results and actions pertaining to this BBAMP are as set out in relevant sections above. GE Renewable Energy Onshore Wind - Projects and Services will be responsible for submission of all relevant reports.

4.4 Injured birds and bats

Injured birds and bats may be encountered during carcass searches or incidentally. Handling injured birds and bats requires specialist skill as there is the risk of injury to both animals and people and there is potential for disease transmission in some cases. Injured birds and bats will only be handled by person(s) authorised under the *Biodiversity Conservation Act 2016*. To reduce the risk associated with Australian Bat Lyssavirus, any injured bats must be handled only by people who have up-to-date rabies vaccination (an appropriate level of antibodies for the rabies virus, based on vaccination, is considered to offer the best available protection against Australian Bat Lyssavirus). The details of any injured birds and bats found will be recorded on a dead or injured bird and bat data sheet (see Appendices).

Prior to implementation of this plan, arrangements must be made with a conveniently located veterinary surgery to ensure that arrangements are in place for acceptance and treatment of any injured birds or bats. As options for treatment of injured wildlife may change over the life of the wind farm, an arrangement must be kept current and current telephone numbers for the surgery and for WIRES Wildlife Rescue must be



readily available to all site personnel (e.g. on their mobile phones). Where an injured animal can be readily captured it should be placed into a tied calico bag or a box and kept in a quiet and dark location while it is transported to a veterinarian for treatment. In the event that an injured animal cannot be readily captured site personnel should telephone WIRES Wildlife Rescue (current telephone number is 1300 094 737) for assistance.

A data sheet must be completed as per Section 5.1.8 *Incidental finds of bird or bat carcasses* for any injured bird or bat suspected to have collided with a wind turbine (see Appendices).

Table 9 Requirements for injured birds and bats

Action	Timing /Frequency	Adaptive Management	Reporting	Responsible Party	Objective	Measure
Ensure only appropriately qualified, trained and vaccinated personnel are engaged to handle injured bats and birds	Appropriate trained staff or contractor to be engaged prior to the commissionin g of the wind farm and ongoing		N/A	Contracted qualified ecologist; person(s) authorised under Biodiversity Conservation Act 2016	Ensure injured wildlife is appropriately care for by qualified staff or contractors by appointing a contractor or inducting staff appropriately	Provide a list of qualified staff and contractors to OEH
Liaise with local veterinary practitioner in preparation for incidence of injured wildlife	Prior to the commissionin g of the wind farm and ongoing	Veterinarian may be required to euthanize some injured birds and bats	N/A	GE; contracted qualified ecologist	Ensure injured wildlife is appropriately care for a veterinarian as required	Provide a list of engaged veterinarians to OEH
Train site personnel on procedures for dealing with injured birds and bats found incidentally	Prior to the commissionin g of the wind farm and ongoing	N/A	N/A	Contracted qualified ecologist to provide appropriate training	Site Personnel are inducted to understand the procedures regarding injured wildlife and the possible ramifications for not following this procedure	Inductions have been completed for all site personnel and date of attendance has been recorded. A list of qualified staff has been provided to OEH



Action	Timing /Frequency	Adaptive Management	Reporting	Responsible Party	Objective	Measure
Complete data sheets for any injured birds and bats found	Injured bats and birds may be found at any time during high intensity or general intensity turbine collision carcass searches or incidentally	N/A	N/A	Contracted qualified ecologist	Ensure all injured birds and bats are reported and action taken is recorded using the dead or injured bat/bird data sheet	Provide a log of all complete data sheets in the annual report



5 Management to minimise impacts on birds and bats

Information in this section is provided to meet requirements of Conditions 17 b) and 19 of schedule 3 of the MOD 3 (c) in relation to potential measures to enhance or protect species of interest.

5.1 Turbine locations relative to raptor nests

Condition 17 b) of schedule 3 of the MOD 3 project approval requires turbines are located as far far as possible, but at least 200 metres from raptor nests. The condition pertaining to distance from any raptor nests was applied during the design phase of the wind farm when siting of turbines was determined. The immediate environs of a nest will have a greater frequency of flights by breeding birds than the wider airspace and siting of turbines away from those zones is a precautionary measure intended to reduce the incidence of flights that may be at increased risk of collision with turbines. Preconstruction surveys located a single Wedge-tailed Eagle nest and the closest turbines (T10 and T11) are sited more than one kilometre to its north-west. Pre-construction surveys have not detected nests of any other raptors.

It is possible that raptors of various species may build nests within 200 metres of a turbine during the operational life of the wind farm. Wind farm operations personnel will be provided with training in the identification of potential raptor nests. If a potential raptor nest is detected within 200 metres of a turbine, a qualified ecologist will be called in to confirm identity of the nesting species and to ascertain whether the nest location represents heightened risk to a threatened species. If so, OEH will be notified and a strategy to reduce risk will be determined. Shut-down of turbines will be a last resort, but may be used in the short-term where the nest is particularly close to a turbine and heightened risk is likely to resolve itself once the nesting event finishes.

5.2 Minimising raptor perch sites

The earliest wind farms used turbines with lattice towers that provided multiple perching opportunities for raptors and this attraction to those turbines was implicated in high rates of turbine collisions. As with all modern turbines, the towers to be used at Silverton Wind Farm are monopoles that offer no perching opportunities for raptors or other bird species.

Poles and wires of overhead powerlines can also provide perching and nesting sites for raptors. Silverton Wind Farm has been designed with the majority of power transmission in underground lines. Where overhead powerlines are necessary, power poles have been chosen for their design aimed at restricting opportunities for raptors to use them as perches. This is of value to operation of the wind farm in minimising the risk of birds or their nests resulting in power outages.

Trees and other features provide natural perching sites for raptors. Maps prepared by EHP (undated) show two raptor perches, one each in proximity of turbines T06 and T39. It is not known whether these perches are used more frequently than any others, but from the variety of raptor species identified in the vicinity, there can be no doubt that raptors will use multiple natural sites as perches. It is not considered to be appropriate to remove natural perches or to otherwise actively attempt to discourage birds from using natural perches.

It is possible that raptors of various species may frequent favoured perch locations within 200 metres of a turbine during the operational life of the wind farm. Wind farm operations personnel will be provided with training in the basic identification of raptor species. In the event that a potentially favoured raptor perch site is



detected within 200 metres of a turbine, a qualified ecologist will be called in to confirm identity of the species and to ascertain whether the perch location represents heightened risk to a threatened species. If so, OEH will be notified and a strategy to reduce risk will be determined. Removal of the perch site may be considered if it is a dead tree and there is considered to be a reasonable likelihood of reducing risk by doing so.

5.3 Large animal carcass removal

The timely removal of carcasses of livestock and other larger animals, such as destroyed feral species, from the wind farm may help reduce the incidence of collision with turbines by raptors that routinely feed on carrion and may be attracted to carcasses. Note that carcasses of birds and bats that may have resulted from collisions with turbines are not to be removed as part of this process.

A carcass removal program will be implemented for the life of the wind farm and will apply to any carcass other than those of birds and bats, found anywhere within the wind farm site. All site personnel (staff and contractors) will be inducted into a reporting procedure that will apply during all wind farm operations, including collision carcass searches (see below). The wind farm will implement a routine for removal and burial of any carcass within 48 hours of its discovery. Any program of feral animal control on the wind farm will include the removal of all carcasses from the wind farm site (see also Silverton Wind Farm Goat Management Plan). The wind farm has legal agreements that cover specific areas including all its infrastructure, roads and hardstand areas. This condition is enforceable on land areas covered by those agreements. The wind farm operator will make all efforts to work collaboratively with adjacent land managers, including, where achievable, entry into formal agreements to provide for co-operative and coordinated detection and removal of large animals carcasses from the area within 200 metres of all turbines.

Table 10 Large animal carcass removal requirements

Action	Timing /Frequency	Adaptive Management	Reporting	Responsible Party	Objective	Measure
The wind farm operator will provide information to all staff and contractors on the procedure to follow after discovering a carcass	During daily turbine maintenance and service	N/A	N/A	GE	Site Personnel are inducted to understand the procedures regarding carcass removal and the possible ramifications for not following this procedure	Inductions have been completed for all site personnel and date of attendance has been recorded.



Action	Timing /Frequency	Adaptive Management	Reporting	Responsible Party	Objective	Measure
The wind farm operator will implement a program of carcass removal and burial.	During daily turbine maintenance and service	Specific livestock carcass search and removal may need to be implemented in the event that a high concentration of eagle activity near a turbine indicates they may be at heightened risk.	N/A	GE	Remove carcasses within 48 hours of discover to reduce the incidence of feeding on carrion by raptors	Date of discovery and date of removal are recorded in a Carrion Data Log. Any exceedance of 48 hours is investigated via incident report and internal audit. These data logs are included in the report to OEH and DPE
Feral animal control programs.	As part of any feral animal management control program	Specific carcass searches may need to be implemented during any program of feral predator or herbivore control undertaken on the wind farm or its immediate environs.	N/A	GE; pest animal control contractor	Remove carcasses as soon as possible by engaging a relevant pest control expert within 48 hours of discovery	Date of discovery and date of removal are recorded in a Carrion Data Log. Any exceedance of 48 hours is investigated via incident report and internal audit. These data logs are included in the report to OEH and DPE



5.4 Pest animal control

Pest animal control will be undertaken as part of routine environmental management of the wind farm and land managed by the wind farm operator. Control of all pest species will be carried out in accordance with NSW legislation, policy and strategies administered by the Department of Primary Industries. Section 3.3 provides detail of the requirements for removal of carcasses, including those of any pest species that may attract large raptors into the close proximity of turbines (see also Silverton Wind Farm Goat Management Plan).

Control of rabbits around wind turbines is a specific action that may minimise collision risk because rabbits are primary prey for large raptors. A pest animal control program will be implemented for the life of the wind farm. All site personnel (staff and contractors) will be inducted into a procedure for reporting the location of any rabbit warren or other site of high rabbit density. The wind farm operator will be responsible for its obligatory requirements for control of pest animals on all land for which it has legal responsibility. The wind farm has legal agreements that cover specific areas including all its infrastructure, roads and hardstand areas. This condition is enforceable on land areas covered by those agreements. The wind farm operator will make all efforts to work collaboratively with adjacent land managers, including, where achievable, entry into formal agreements to provide for co-operative and coordinated detection and removal of large animals carcasses from the area within 200 metres of all turbines.

Table 11 Pest animal control requirements

Action	Timing /Frequency	Adaptive Management	Reporting	Responsible Party	Objective	Measure
The wind farm operator will implement a program of pest control. A pest animal contractor will be engaged as required.	During all wind farm operations.	Specific or increased control measures will be instigated as required according to fluctuating densities of pest animals.	N/A	GE; pest animal control contractor.	Work with leaseholders to reduce the incidence of rabbits and other pests	Documented corresponden ce with leaseholders and land managers
The wind farm operator will inform all personnel & contractors of the procedure to follow on detection of a warren or high density of rabbits on wind farm land.	During all wind farm operations.	N/A	N/A	GE	Site personnel are inducted to understand the procedures regarding pest control and the possible ramifications for not following this procedure	Inductions have been completed for all site personnel and date of attendance has been recorded.



5.5 Deterrence of bats from turbines

The reasons that bats may fly in close proximity to wind turbines are not fully understood, however bats do collide with the blades of turbines and barotrauma, in which respiratory collapse occurs due to air pressure differentials in close proximity to rotor blades, has also been reported. The incidence of barotrauma has been questioned since it was first reported but that question appears to remain unresolved at present.

Some species of bats are attracted to concentrations of insect prey that can occur near artificial lights. Turbines at Silverton Wind Farm will not be lit and they will not have aviation warning lighting. Artificial lighting will thus not be a cause of attraction of bats to turbines at the wind farm.

Some techniques intended to deter bats from approaching wind turbines have been tried overseas. They include methods using radar, ultrasonic bat calls, thermal imaging and acoustic sensors. Some of these are designed to provide automated detection of bat collisions rather than to provide actual deterrence of bats. The great majority of them are experimental and they have not been widely applied to commercial wind energy facilities and there is no body of peer-reviewed rigorous evidence for their performance. At present a 'best practice' mechanism for deterrence of bats in Australian environments is not available.

It is notable that many of the bats species that have been subjects of particular concern in North America and Europe are long-distance migrants and large numbers of collisions documented for some of them appear to relate to high concentrations and specific periods when these species are on migration passage using defined routes. The majority of bat species of interest for Silverton Wind Farm are not known to undertake long-distance migrations and most of them are believed to be year-round residents. Evidence from seasonality of records suggests that Yellow-rumped Sheathtail Bats may be largely absent from southern Australia in the first months of each year, but that they are present during the latter half of the year (Aitken 1975; Churchill 1998). They may thus migrate between the north and south of the continent, however, unlike some northern hemisphere species, there are no known defined migratory pathways where Australian bat species may be at increased risk of collisions and Silverton Wind Farm is certainly not known to be on any such route.

It is possible that reduction of bat collisions can be achieved by the use of low wind speed turbine curtailment, although at present no information is available about response to wind speed by Australian species of bats. Overseas investigations (e. g. Martin *et al.* 2013) have found that a variety of bats concentrate their flight activities during periods of low wind speed (i.e. at wind speeds of between approximately 0 and 7 metres per second). Subject to confirmation of technical requirements by the turbine manufacturer, consideration may be given to programming turbines so that rotor blades will remain feathered and not rotate during periods of the night when wind speeds are below those at which turbines generate electricity (i.e. at wind speeds of between approximately 0 and 3 metres per second).

5.6 Adaptive management of turbines to reduce collisions

Management measures specifically aimed at reducing specific risks at provided in each subsection above.

Within three months of the completion of each year of all activities set out in this BBAMP, a report will be prepared and submitted to OEH. The report will provide results of all investigations and studies related to effects of Silverton Wind Farm on bird and bat species of interest. In collaboration with OEH, the results will be considered to determine whether any changes to processes or management actions are required. Any such changes will be focussed on improvements to reduce impacts on bird and bat species of interest, specifically, in the event that detected collisions with turbines by any such species have reached or exceeded trigger levels set out here.



Silverton Wind Farm is in an environment different from the great majority of wind energy facilities in Australia that are located within more intensive cropping and grazing agricultural areas. It is not feasible to foresee what potential factors might lead to an unexpectedly high level of collisions by any species.

Appropriate mitigation measures can be prepared only if a cause, or causes, of ecologically significant impacts on the relevant species is known. If a cause is not readily apparent then investigation of the reason(s) for the impact must be undertaken prior to proposal of a mitigation strategy. Advice from OEH will be sought with regard to design and implementation of any such investigations and of an ultimate mitigation strategy, if required. OEH will be notified within two working days of determination by GE or the contracted qualified ecologist that a trigger level for any species of interest is detected. Liaison with OEH will commence to determine a strategy aimed at reducing the incidence of collisions as soon as is practical thereafter.

Any mitigation strategy will be tailored to the needs of the particular species affected and will be formulated if and when the nature and cause(s) of the impact are known. It will be submitted to OEH and will be implemented when approved.

Broad categories of potential causes of heighten collision risk may include the following:

- Agricultural practices, such as feeding of grain to stock, that may result in concentrations of birds in proximity of turbines
- Control of pest animals and management of stock and large animal carcasses
- Possible seasonal attraction of bats to turbines
- Seasonal nesting or roosting in proximity of turbines
- Periodic environmental conditions such as localised high densities of natural food sources or availability of surface water.

If a trigger level of collisions is detected and it can be attributed to a cause such as one of these, then an appropriate management action may be feasible. Land management practices can be altered or short-term management of turbines may be able to be implemented. Shut-down of turbines will be last resort, but may be used in the short-term if a particular turbine is involved and the cause is likely to resolve itself, for example once a nesting event finishes.



References

Aitken, P. 1975. Two new bat records from South Australia with a field key and checklist to the bats of the state. South Australian Naturalist 50: 9-15.

Brett Lane & Associates 2017. White Rock Wind Farm Stage 1 Bird and Bat Adaptive Management Program. Prepared for White Rock Wind Farm Pty Ltd.

Churchill. S. 1998 Australian Bats. Reed New Holland, Sydney.

Commonwealth of Australia 2009. EPBC Act Policy Statement 2.3 Wind Farm Industry.

Commonwealth of Australia 2010a. Survey guidelines for Australia's threatened birds. Guidelines for detecting birds listed as threatened under the Environment Protection and Biodiversity Conservation Act 1999.

Commonwealth of Australia 2010b. Survey guidelines for Australia's threatened bats. Guidelines for detecting bats listed as threatened under the Environment Protection and Biodiversity Conservation Act 1999.

Commonwealth of Australia 2013. Matters of National Environmental Significance: Significant impact guidelines 1.1 Environment Protection and Biodiversity Conservation Act 1999.

Commonwealth of Australia 2015a. Draft referral guideline for 14 birds listed as migratory species under the EPBC Act.

Dalthorp, D., Huso, M., and Dail, D. 2017. Evidence of absence (v2.0) software user guide: U.S. Geological Survey Data Series 1055, 109 p., https://doi.org/10.3133/ds1055.

de Lucas, M., Janss, G.F.E., Whitfield, D.P. & Ferrer, M. 2008. *Collision fatality of raptors in wind farms does not depend on raptor abundance*. Journal of Applied Ecology 45: 1695–1703.

Ferrer, M., de Lucas, M., Janss, G.F.E., Casado, E., Muñoz, A.R., Bechard, M.J. & Calabuig, C.P. 2012. *Weak relationship between risk assessment studies and recorded mortality in wind farms.* Journal of Applied Ecology 49: 38–46.

Hull, C.L. and Cawthen, L. 2013. Bat fatalities at two wind farms in Tasmania, Australia: bat characteristics, and spatial and temporal patterns. New Zealand Journal of Zoology 40 (1): 5-15.

Hull, C.L. and Muir, S. 2010. *Search areas for monitoring bird and bat carcasses at wind farms using a Monte-Carlo model.* Australasian Journal of Environmental Management 17: 77 – 87.

Hull, C.L., Stark, E.M., Peruzzo, S. and Sims, C.C. 2013. Avian collisions at two wind farms in Tasmania, Australia: taxonomic and ecological characteristics of colliders versus noncolliders, New Zealand Journal of Zoology, 40 (1): 47-62.

Huso, M. and Dalthorp, D. 2014. Accounting for Unsearched Areas in Estimating Wind Turbine-Caused Fatality. The Journal of Wildlife Management 78:347–358.



Huso, M., Dalthorp, D. and Korner-Nieverglt, F. 2017. Statistical principles of post-construction fatality monitoring. Chapter 4 in M.R. Perrow (ed) Wildlife and Wind Farms, Conflicts and Solutions. Volume 2 Onshore: Monitoring and Mitigation. Pelagic Publishing. Exeter UK.

Klein, J.P. and Moschberger, M.L. 2003, Survival Analysis: Techniques for Censored and Truncated Data, Springer, New York.

Law, B., Gonsalves, L., Tap, P., Penman, T. and Chide, M. 2015. Optimizing ultrasonic sampling effort for monitoring forest bats. Austral Ecology 40 (8): 886-897.

Madders, M. & Whitfield, D.P. 2006. *Upland raptors and the assessment of wind farm impacts*. Ibis 148: 43–56.

Martin, C.M., Arnett, E.B., Stevens, R.D. and Wallace, M.C. 2017. Reducing bat fatalities at wind facilities while improving the economic efficiency of operational mitigation. Journal of Mammalogy. 98:378–385.

Mathews, F., Swindells, M., Goodhead, R., August, T.A., Hardman, P., Linton, D.M., Hosken, D.J., 2013. Effectiveness of search dogs compared with human observers in locating bat carcasses at wind-turbine sites: a blinded randomized trial. Wildlife Society Bulletin 37:34–40.

NGH Environmental 2016. Bird and Bat Risk Assessment Silverton Wind Farm.

Pennay, M. 2017. Review of Silverton wind farm bat monitoring.

Smales, I. 2017. Modelling collision risk and populations. Chapter 3 in M. Perrow (ed) Wildlife and Wind Farms, Conflicts and Solutions. Volume 2 Onshore: Monitoring and Mitigation. Pelagic Publishing. Exeter, UK.



Appendices

Appendix 1: Turbine mortality survey data sheet

Survey details:					
Date:	Observers:				
Start time:	Finish time:				
Turbine ID:					
Survey methodology (please tick):					
Dog ID					
Human observers					
Incidental (Any bird or bat turbine mortality observed	outside a routine survey)				
Ground visibility (circle): High Moderate Poor					
	NOTE: If not, estimate area covered as a percentage (%) of total search				
Yes / No a	rea:				
Survey limitations (e.g. long grass, any areas that were inacc	essible/not surveyed and why):				
Weather details (please circle):					
Temperature:					
Precipitation: Fine Showers Rain	1				
Wind strength: Calm Breeze Mod	derate Strong				
Wind direction: Clou	ud cover (%):				
Turbine bird and bat mortality record:					
Dead/injured bird or bat recorded? Yes / No If yes, record total number:	Bird and Bat carcass / injury datasheet completed? Yes / No	Photographs taken? Yes / No			
Additional notes					



Appendix 2: Dead or injured bird / bat data sheet

This datasheet must be completed for every dead / injured bird or bat found during high- and general-intensity turbine mortality surveys. This datasheet should also be completed for any dead /injured bird or bar recorded incidentally (i.e. not during routine surveys).

Each dead bird or bat (including feather spots) must be removed upon discovery and placed into a clearly labelled plastic bag with the date, time, location (GPS coordinates) and turbine number, as required for species identification.

Date and location:						
Date:			Observer/s:			
Time animal was found	d:					
Turbine ID:			Easting/Northin	g of carcass:		
Detection:						
Survey method (circle):	: Dog		nan search nsity	Incidental	NOTE: turbine survey datasheet must also be completed.	
Distance of carcass / ir	njured animal from	observer when fir	rst detected:			
Describe ground visibility within a 1 m radius of where carcass / injured animal was found:						
Carcass / injured animal photographed? Photo and camera details (e.g. camera number, photo numbers				camera number, photo numbers,		
Yes / No location of saved photos):						
Weather details at ti	me of detection (please circle):				
Temperature:						
Precipitation:	Fine	Showers	Rain			
Wind strength:	Calm	Breeze	Moderate	Strong	7	
Wind direction:			Cloud cove	r (%):		
Carcass / injured anii	mal information a	and condition:				
Species (if unknown clo	osest taxonomic gi	roup, e.g. raptor, b	at):			
Age (circle):	Unknown	Ac	lult	Juver	nile	
Sex (circle):	Unknown	М	ale	Femo	ale	
Condition (circle):	dition (circle): Dead (carcass) Ir		jured but alive	Feath	Feather spot (≥ 10 feathers)	
Degree of decay (circle	e): Fresh	М	ore than a week ol	d Very	old or highly decayed	
Describe location and	type of any injuries	s evident:				



Describe evidence of scavenging, if any:
Notes / additional information:



Appendix 3. Carcass persistence trial: carcass deployment data sheet


This carcass deployment sheet must be completed for each turbine used in the scavenger trial.

Survey and turbine details:						
Date:			C	Observers:		
Time:	Time:					
Turbine ID:						
Ground visibility (cir	cle): High	Moderate Po	oor			
Description of groun	nd visibility (e.g. gr	ass height, rock co	over):			
Carcass deployme	nt record:					
Carcass type	Unique carcass identifier:	Direction from turbine base:	Distance fr turbine bas		Notes:	
Additional notes:						



Appendix 4: Consolidated Bird Observation Map

As attached.

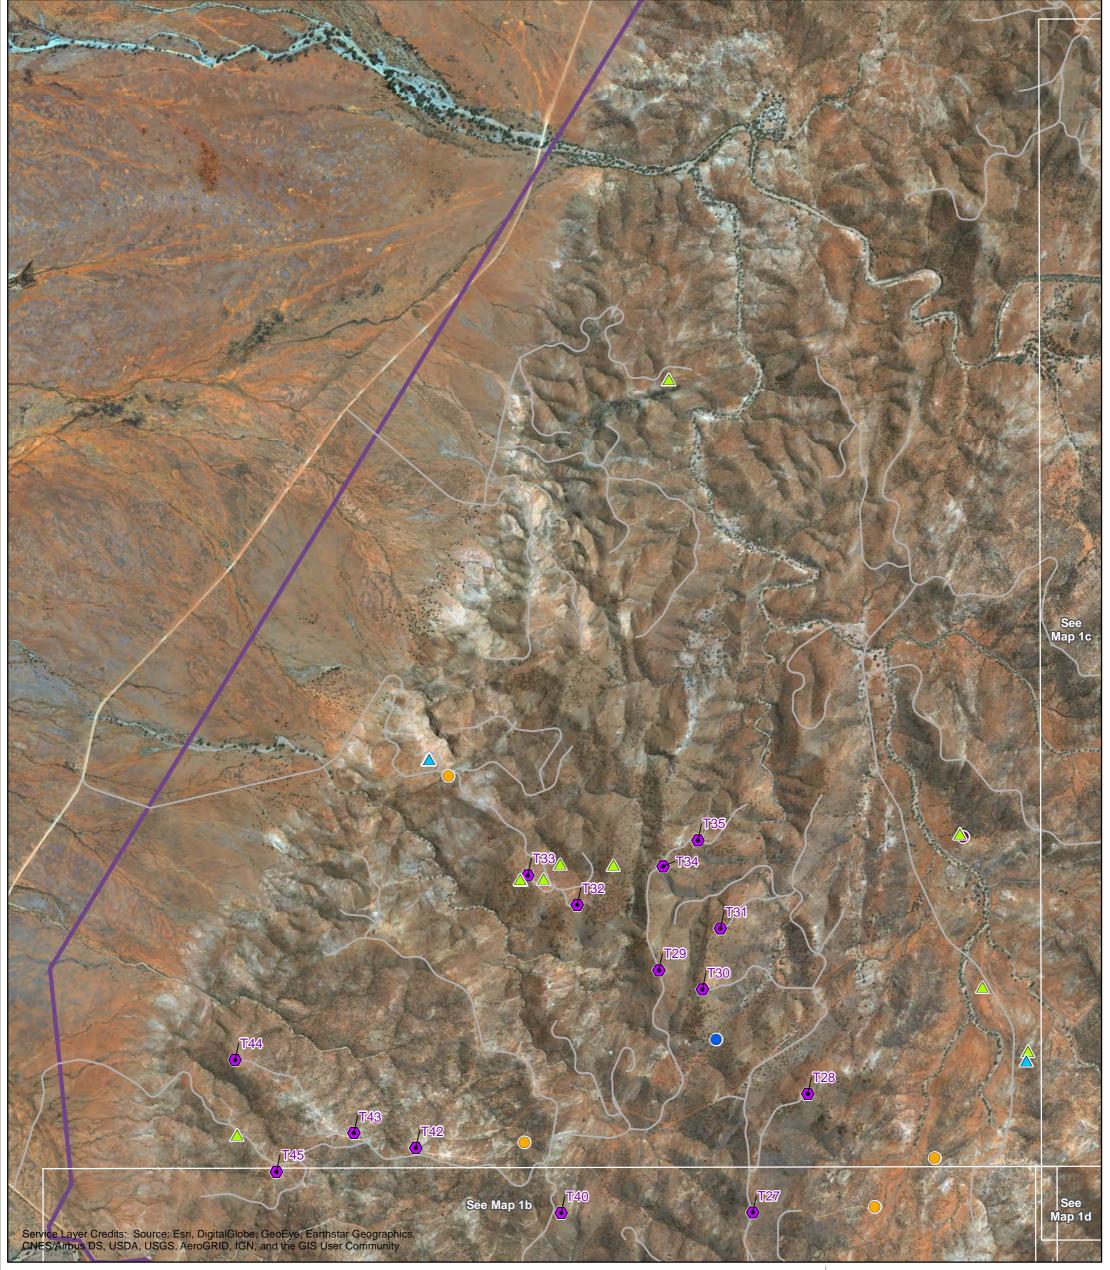

Map 1a Bird Observations Silverton Wind Farm -South

Legend

Silverton Wind Farm boundary

Turbine locations


---- Access tracks

Threatened Birds

- Hooded Robin (south-eastern form)
- Rufous Fieldwren
- Varied Sittella

At-risk Birds

- Nankeen Kestrel





Metres




Scale at A3 is 1:27,000 Map publish date: 30/10/2017

Silverton Wind Farm related data provided by WGA/ Threatened Birds, At-risk Birds and Raptor Nests data provided NGH Environmental / Raptor Perches provided by Ecology and

Heritage Partners 9381_SilvertonWF_BirdObs_MB 30/10/2017 melsley



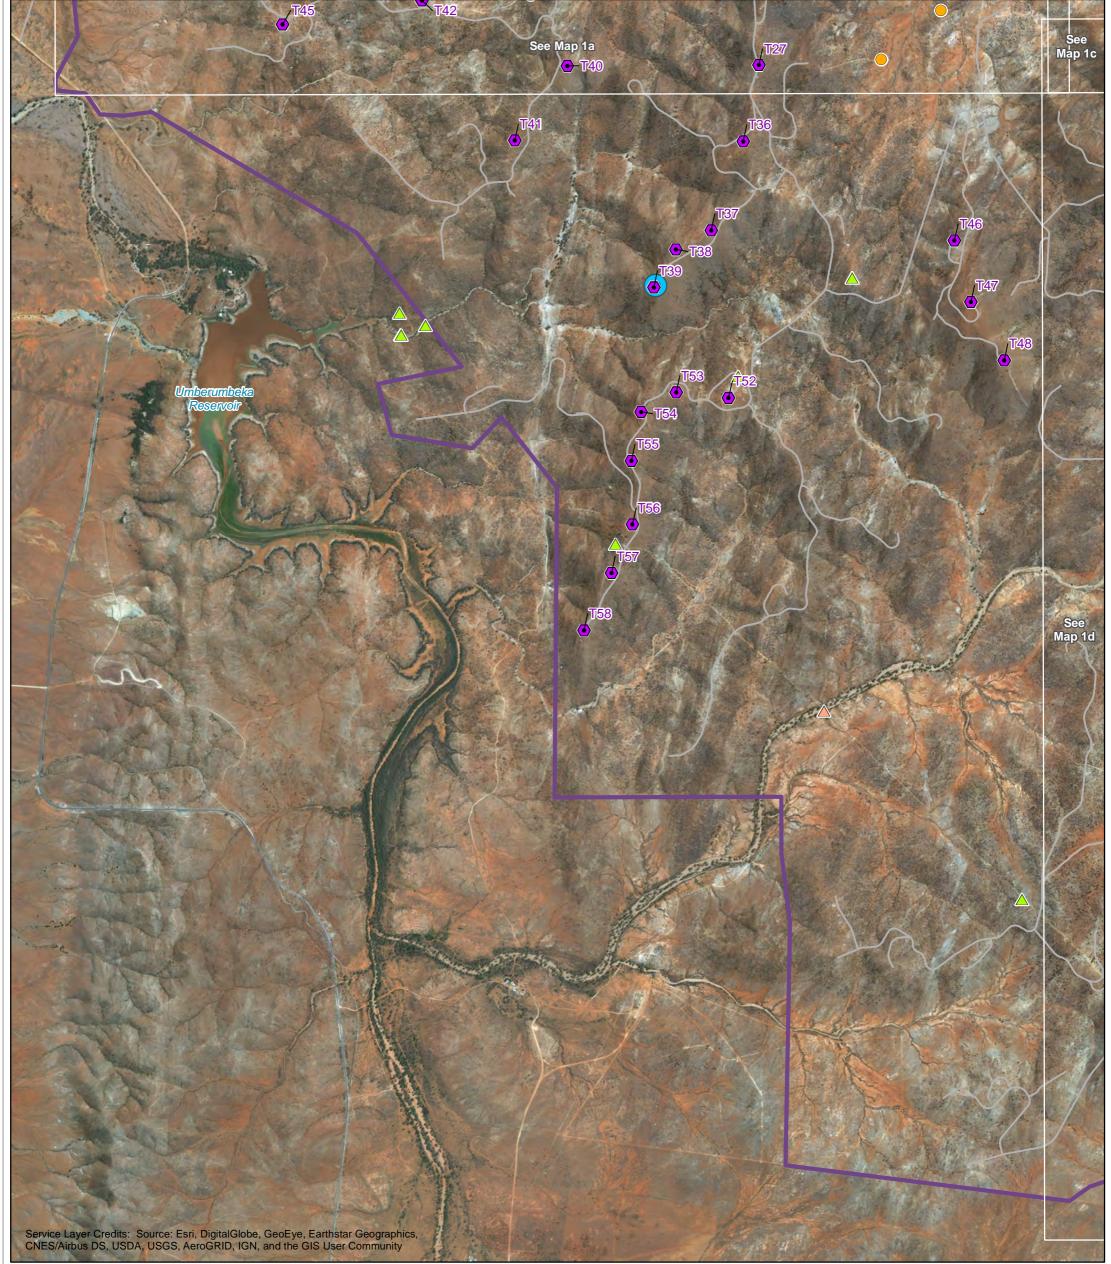

Map 1b Bird Observations Silverton Wind Farm -South

Legend

Silverton Wind Farm boundary

Turbine locations

—— Access tracks

Threatened Birds


Hooded Robin (south-eastern form)

At-risk Birds

△ Brown Falcon

Wedge-tailed Eagle

Raptor Perch





Metres



Scale at A3 is 1:27,000

Map publish date: 30/10/2017

Silverton Wind Farm related data provided by WGA / Threatened Birds, At-risk Birds and Raptor Nests data provided NGH Environmental / Raptor Perches provided by Ecology and Heritage Partners 9381_SilvertonWF_BirdObs_MB 30/10/2017 melsley



Raptor Nest

Raptor Perch

Map 1c Bird Observations Silverton Wind Farm -South

Legend

Silverton Wind Farm boundary

Turbine locations


Access tracks

Threatened Birds

- Black-breasted Buzzard
- Hooded Robin (south-eastern form)
- Varied Sittella


At-risk Birds


- ▲ Black Kite
- Nankeen Kestrel
- △ Wedge-tailed Eagle





Metres






9381_SilvertonWF_BirdObs_MB 30/10/2017 melsley

0394 CilvarianIME BirdOha MB 20/40/2047 mala

ecology & heritage

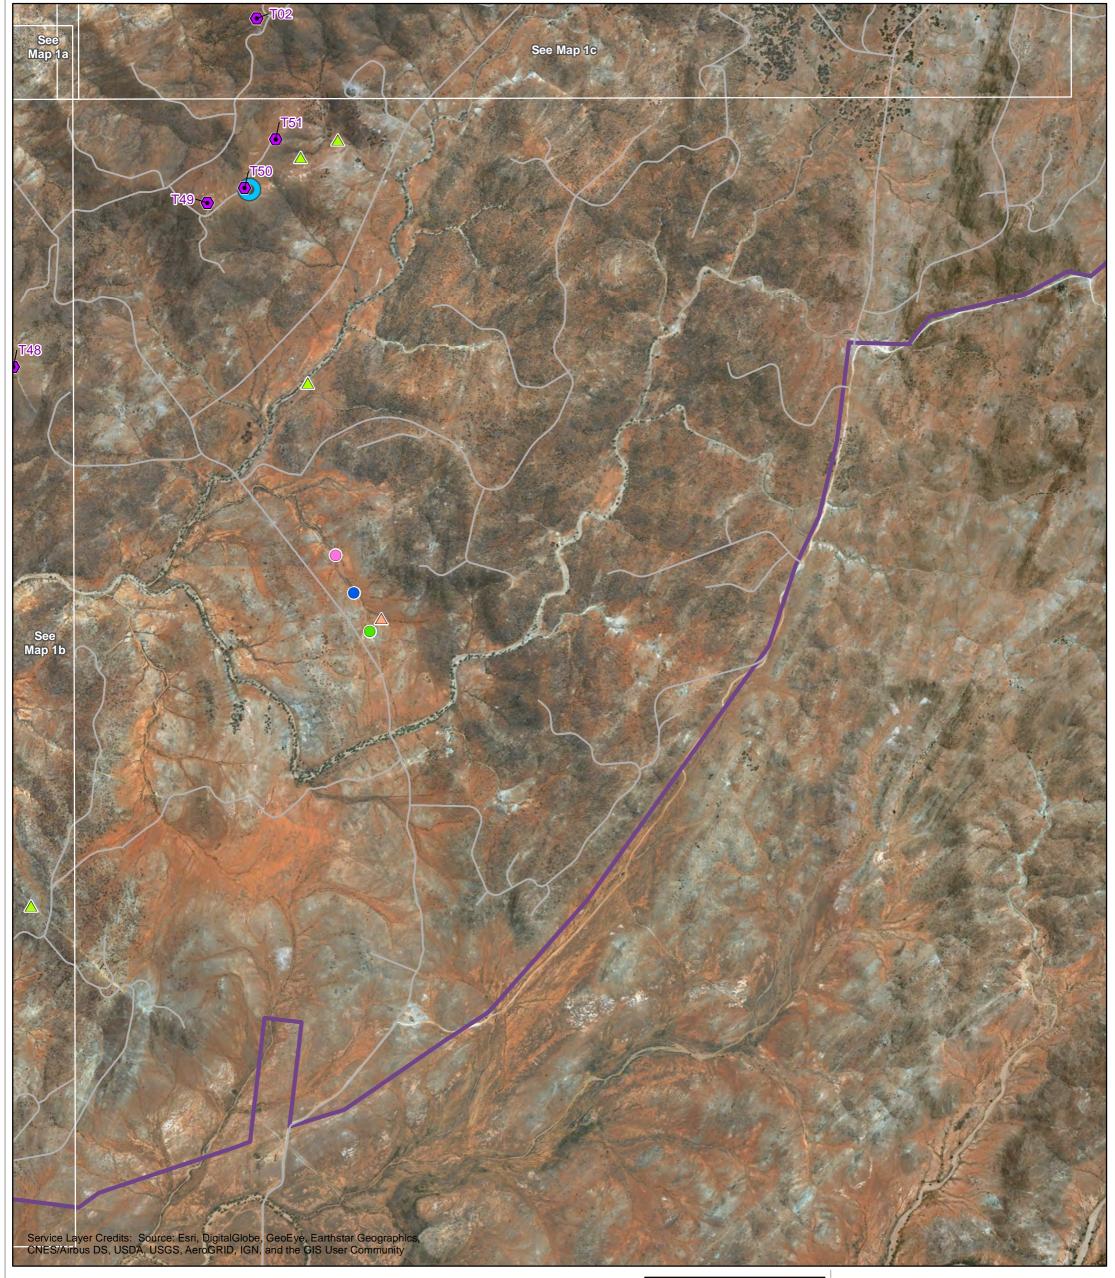

Map 1d **Bird Observations** Silverton Wind Farm -South

Legend

Silverton Wind Farm boundary

Turbine locations

Access tracks

Threatened Birds


- Redthroat
 - Rufous Fieldwren
- **Spotted Harrier**

At-risk Birds

Brown Falcon

Wedge-tailed Eagle

Raptor Perch





Metres



Scale at A3 is 1:27,000 Map publish date: 30/10/2017

Silverton Wind Farm related data provided by WGA/ Threatened Birds, At-risk Birds and Raptor Nests data provided NGH Environmental / Raptor Perches provided by Ecology and Heritage Partners


9381_SilvertonWF_BirdObs_MB 30/10/2017 melsley

ecology & heritage



Appendix 5: Consolidated Bat Observation Map

As attached.

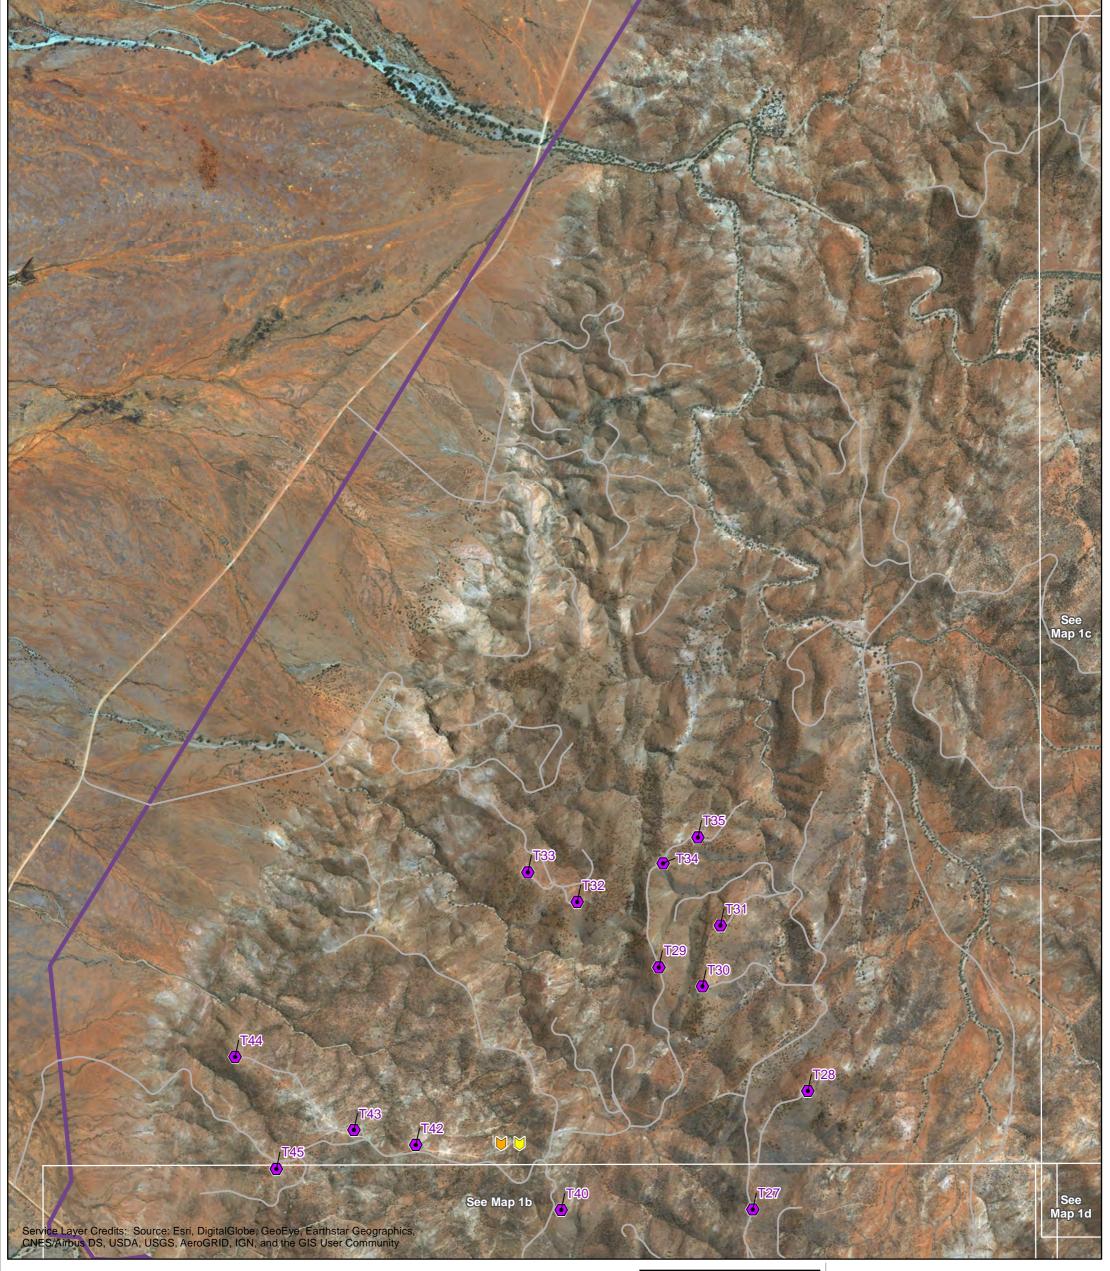

Map 2a
Bat Observations
Silverton Wind Farm South

Legend

Silverton Wind Farm boundary


Turbine locations

— Access tracks

At-risk Bats

Lesser Long-eared Bat








Metres

Scale at A3 is 1:27,000

Map publish date: 30/10/2017

Silverton Wind Farm related data provided by WGA/
Threatened Bats and At-risk Bats provided by NGH
Environmental / Potential Bat Roosting Sites provided by
Ecology and Heritage Partners
9381_SilvertonWF_BatObs_MB 30/10/2017 melsley

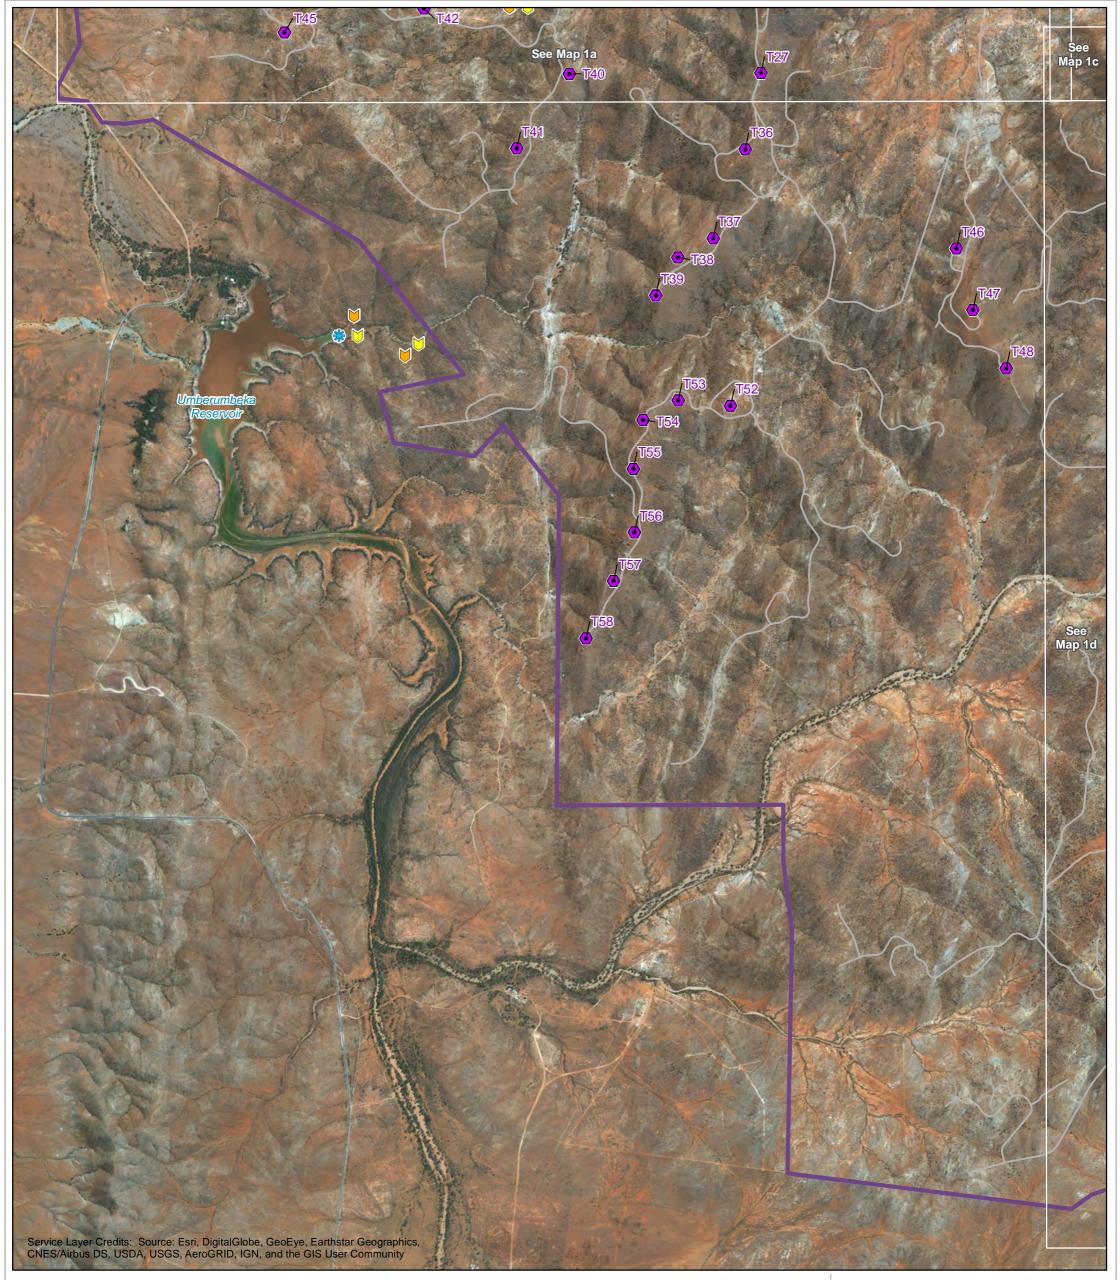

Map 2b
Bat Observations
Silverton Wind Farm South

Legend

Silverton Wind Farm boundary

Turbine locations


— Access tracks

Threatened Bats


Inland Forest Bat

At-risk Bats

Inland Free-tailed Bat










Metres

Scale at A3 is 1:27,000

Map publish date: 30/10/2017

Silverton Wind Farm related data provided by WGA /
Threatened Bats and At-risk Bats provided by NGH
Environmental / Potential Bat Roosting Sites provided by
Ecology and Heritage Partners
9381_SilvertonWF_BatObs_MB 30/10/2017 melsley

ertonWF_BatObs_MB 30/10/2017 me

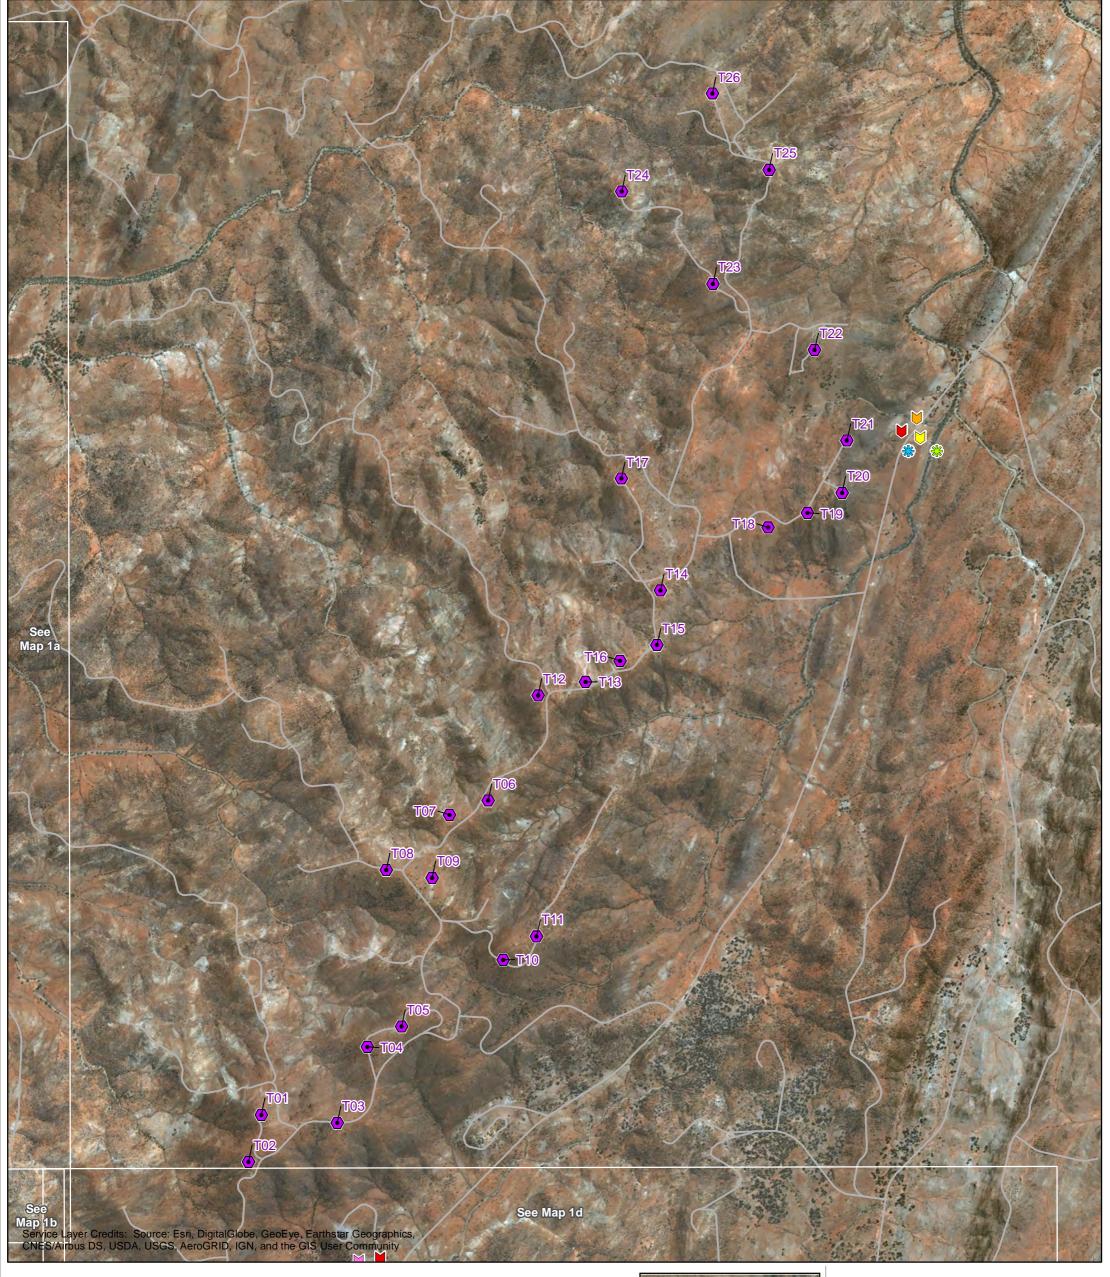

Map 2c Bat Observations Silverton Wind Farm -South

Legend

Silverton Wind Farm boundary

Turbine locations


— Access tracks

Threatened Bats

- Inland Forest Bat
- Yellow-bellied Sheathtail-bat

At-risk Bats

- Inland Free-tailed BatLesser Long-eared Bat
- White-striped Free-tailed Bat





Metres

Scale at A3 is 1:27,000


Map publish date: 30/10

Map publish date: 30/10/2017

Silverton Wind Farm related data provided by WG



Silverton Wind Farm related data provided by WGA /
Threatened Bats and At-risk Bats provided by NGH
Environmental / Potential Bat Roosting Sites provided by
Ecology and Heritage Partners
9381_SilvertonWF_BatObs_MB 30/10/2017 melsley

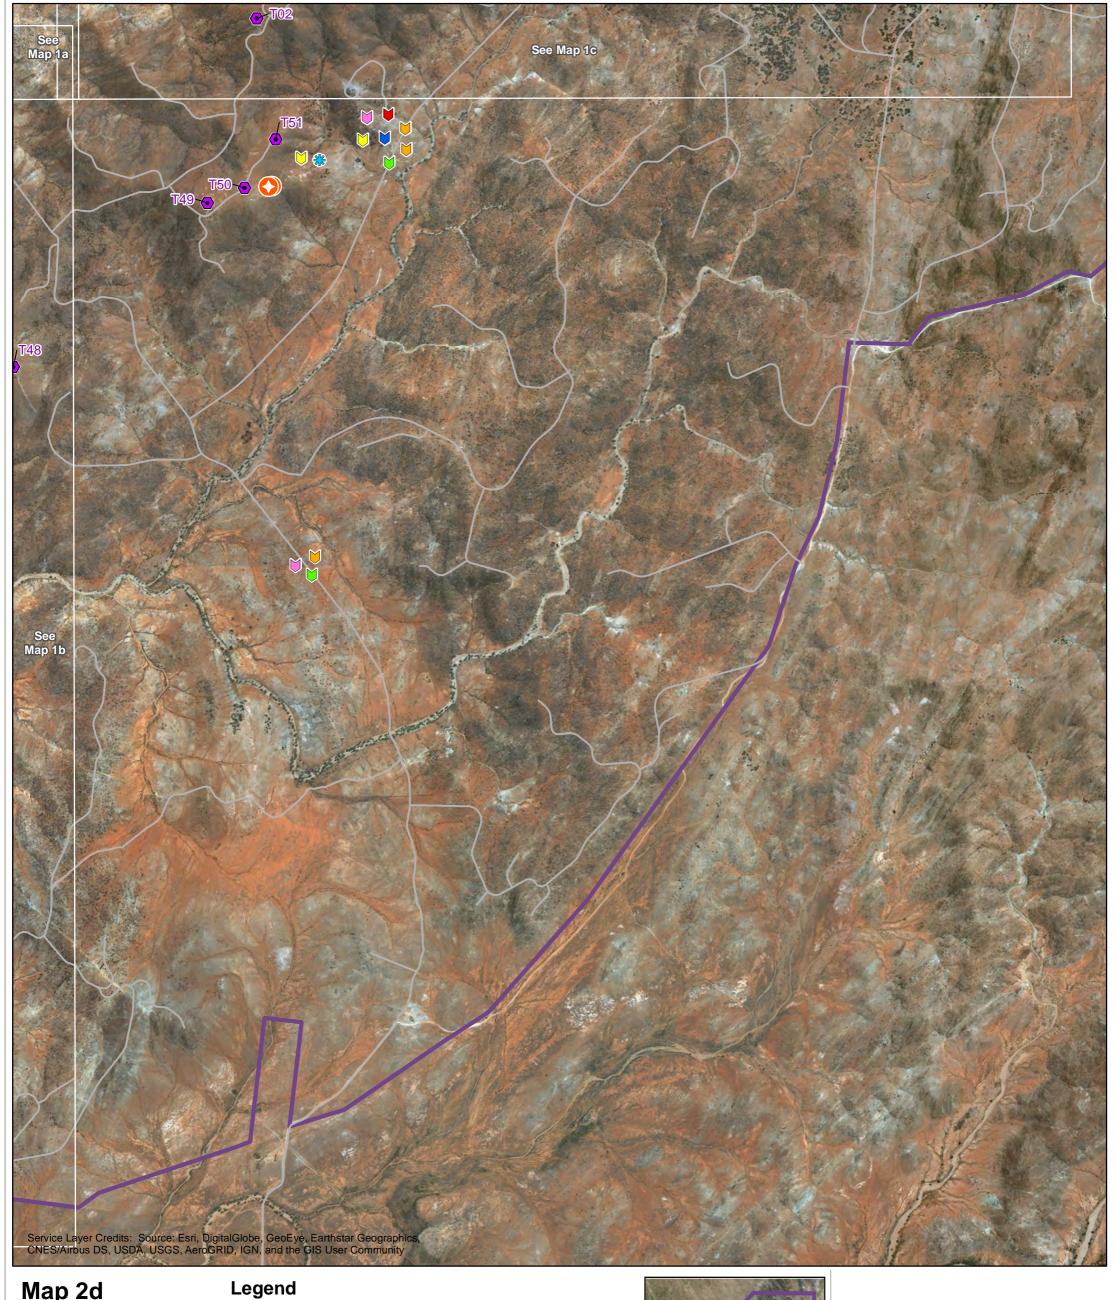

Map 2d Bat Observations Silverton Wind Farm South

Silverton Wind Farm boundary

Turbine locations

- Access tracks

Threatened Bats

Inland Forest Bat

At-risk Bats

Gould's Wattled Bat


Inland Free-tailed Bat

Lesser Long-eared Bat Little Forest Bat

Little Pied Bat


White-striped Free-tailed Bat

O Potential Bat Roosting Site (Cave)





Metres



Silverton Wind Farm related data provided by WGA /
Threatened Bats and At-risk Bats provided by NGH
Environmental / Potential Bat Roosting Sites provided by
Ecology and Heritage Partners
9381_SilvertonWF_BatObs_MB 30/10/2017 melsley





Appendix 6: Bird and Bat Survey Methods

As attached.



Bird and Bat Survey Methods

SILVERTON WIND FARM



NOVEMBER 2017



Document Verification



Project Title: Silverton Wind Farm Bird and Bat Survey Methods

Project No	umber:	16-412	16-412					
Project Fi	le Name:	Silverton Wind Farm Bird and Bat Baseline Surveys						
Revision	Date	Prepared by (name)	Prepared by (name) Reviewed by (name) Approved by (name)					
Final v1.0	9/11/17	Sam Patmore	Nick Graham-Higgs Client Review	Nick Graham-Higgs				

NGH Environmental prints all documents on environmentally sustainable paper including paper made from bagasse (a by-product of sugar production) or recycled paper.

NGH Environmental is a registered trading name of NGH Environmental Pty Ltd; ACN: 124 444 622. ABN: 31 124 444 622

www.nghenvironmental.com.au

e ngh@nghenvironmental.com.au

Sydney Region 18/21 mary st surry hills nsw 2010 (t 02 8202 8333)

Newcastle - Hunter and North Coast 7/11 union st newcastle west nsw 2302 (t 02 4929 2301) Canberra - NSW SE & ACT 17/27 yallourn st (po box 62) fyshwick act 2609 (t 02 6280 5053)

Bega - ACT and South East NSW suite 1, 216 carp st (po box 470) bega nsw 2550 (t 02 6492 8333) Wagga Wagga - Riverina and Western NSW suite 1, 39 fitzmaurice st (po box 5464) wagga wagga nsw 2650 (t 02 6971 9696)

> Bathurst - Central West and Orana 35 morrisset st (po box 434) bathurst nsw 2795 (t 02 6331 4541)

CONTENTS

1	INT	rodu	CTION & PROJECT BACKGROUND	. 3
2	ov	ERVIE	N OF TYPES OF SURVEYS TO BE CONDUCTED	. 4
2.1	SUI	RVEY S	TRATIFICATION	.4
2.2	СО	NSIDEF	RATION OF STATISTICAL RIGOUR OF APPROACH	.5
3	DE.	TAILED	SURVEY METHODS	. 6
3.1	BIR	D UTIL	ISATION SURVEYS	.6
3.1	l.1	Passeri	ne bird surveys	. 6
3.1	L.2	Raptor	surveys	. 6
3.1	l.3	Opport	tunistic Records	. 7
3.1	L.4	Numbe	er and location of bird surveys:	. 7
3.1	L.5	Summa	ary of Bird Utilisation Survey Effort	. 7
3.1	L.6	Timing	of Bird Surveys	. 8
3.2	BA	T SURV	EYS	10
3.2	2.1	Trappii	ng	10
3.2	2.2	Bat De	tectors	10
3.2	2.3	Final su	urvey sites for ongoing monitoring	17
3.2	2.1	Timing	of Bat Surveys	21
APPE	NDI	K A	SURVEY PLAN	\-
APPEI	NDI	КВ	RESPONSES AGAINST EXPERT REPORT RECOMMENDATIONS	I
APPEI	NDI	кс	SYMBOLIX LETTER OF ADVICE	2-1
APPEI	NDI	K D	DETAILED BIRD SURVEY METHODS)-l
Bir	d Ut	tilisatio	n Surveys)-l
APPEI	NDI	ΚE	SUMMARY OF REVISED SURVEY PLAN AGAINST COMMONWEALTH GUIDELINES	E-I
APPEI	NDI	K F	SUMMARY OF REVISED SURVEY PLAN AGAINST NSW THREATENED SPECIES SURV	ΕY
GHID	FLIN	FS		5_1



TABLES

Table 1 Passerine bird survey effort	7
Table 2 Raptor bird survey effort	8
Table 3 Seasonal timing of bird surveys	8
Table 4 Schedule of Survey Sites	9
Table 5 Met Mast locations for RSA level monitoring	11
Table 6 Identification of Priority Habitat Areas within the site	13
Table 7 Existing sites to be kept for ongoing monitoring (including sites where a minor rel	ocation is
required)	16
Table 8 Proposed final survey sites	18
Table 9 Summary of survey effort (number of sites per hectare of habitat type)	21
Table 10 Seasonal timing of bat surveys	21

FIGURES

No table of figures entries found.



1 INTRODUCTION & PROJECT BACKGROUND

Project Approval for Silverton Wind Farm (including the latest Modification 3 project design proposal) was received in December 2016. Condition 18, of Schedule 3 (Environmental Conditions) of the approval includes:

Prior to the construction of any wind turbines, the Proponent must prepare a Bird and Bat Adaptive Management Plan for the project in consultation with OEH to the satisfaction of the Secretary. This program must include:

(a) baseline data on threatened and 'at risk' bird and bat species and populations in the locality that could potentially be affected by the project;

The key aims of the baseline surveys is to gather adequate baseline data on the existing bird and bat species composition prior to commencement of construction of the wind farm (i.e. pre-impact data). This data will be required for future comparisons to be made to detect changes in the species use (including changes in activity patterns such as avoidance) of the site post-construction and during operation of the wind farm.

This report provides a single consolidated outline of the methods adopted for the overall Silverton Wind Farm Bird and Bat Baseline Data Collection program. This Baseline Program will be used as an appendix to the Bird and Bat Adaptive Management Strategy.

Also included in this letter (**Appendix B**) are summary responses to the main recommendations made in the OEH Expert Report (Michael Pennay, 2017). The responses should be read in conjunction with the survey methods proposed in this document and the supporting survey effort plan accompanying this document. This revised approach seeks to address the concerns raised by OEH, including the recommendations made in the OEH Expert Report in relation to the bat survey component, as well as having consideration to the relevant survey guideline documents, including the commonwealth's *Survey guidelines for Australia's threatened bats* (DWEHA 2010), and the NSW *Threatened Biodiversity Survey and Assessment: Guidelines for Developments and Activities* (DEC 2004).



2 OVERVIEW OF TYPES OF SURVEYS TO BE CONDUCTED

The Silverton Wind Farm Bird and Bat Baseline Data Surveys have, include the following broad survey types:

- 1. Bird Utilisation Surveys
- 2. Raptor Surveys
- 3. Bat Surveys

The specific methods to be employed for each of the above survey types is detailed further below.

2.1 SURVEY STRATIFICATION

This bird and bat (baseline) survey design has been based on the BACI principle (Before, After, Control, Impact). The baseline surveys are to be completed before commencement of construction of the turbines, and therefore forms the *Before* component of the overall bird and bat surveys. The survey design also includes both *Control* and *Impact* areas as defined below. The *After* component will be covered by ongoing monitoring post commencement of operation, and will be managed under the Bird and Bat Adaptive Management Plan (BBAMP, developed and implemented by others).

Based on previous baseline and ongoing monitoring surveys from other wind farms (and using Boco Rock Wind Farm as the primary example), *Impact* and *Control* zones will be established as follows:

- Impact Zone is defined as the entire area within a 500m radius around each turbine location.
- Control Zone is defined as all areas located more than 1,000m from each turbine (as shown on the attached survey locations plan, based on the latest available information on turbine placements as per the GE-Catcon layout, which proposes 58 turbine sites).

An additional layer of the survey stratification is the seasonality of the surveys to account for possible changes in bird and bat species occurrences and habitat use throughout the year based on seasonal influences.

To account for seasonal difference, the baseline surveys will be conducted over different seasons, including summer, autumn winter and spring. To date, a summer survey (December 2016), and a combined Autumn/Winter period (May/June 2017) have been completed for both bird and bat surveys, and a bird-only Spring survey was undertaken in October 2017. A further bat-only survey will be undertaken in November 2017, as per the survey protocols outlined in this report. A Further bat-only Autumn survey (March 2018) will also be undertaken immediately prior to commencement of operation of turbines to provide further seasonal before impact data for bats. The current status of the bird and bat surveys is also detailed in Tables 3 and 10 of this report.

It is noted that OEH had requested that each survey site would be multiple times during different times of the day. Given the large site area and access difficulties due to lack of existing roads and difficult terrain, this was not possible to achieve during the same seasonal survey. Given the replication of same survey sites at different times of the year (including being conducted at different times of the day between the seasons), as well as the fact that there are numerous sites within the same habitat type (which is relatively homogenous across the majority of the wind farm site – see below for further discussion of stratification based on habitat type), it is believed that there has been sufficient survey effort and replication to account for the majority of species likely to be present at the site, particularly with respect to the differences in utilisation of the main habitat types within the site.



The survey design has also been further stratified to consider bird and bat utilisation within the different habitat types recorded within the broader study area, and informed primarily by the vegetation mapping already completed for the original environmental assessment of the proposed development. The number and location of the Control and Impact survey sites is governed by the overall area of each vegetation type (i.e. habitat availability) present within the study area, and importantly, within both the defined Control and Impact Zones. Accordingly, vegetation types such as the Mulga – Dead Finish will include the greatest number of survey sites as this vegetation type occurs over more than 90% of the overall study area. The breakdown of survey sites within each vegetation type is explained further below in relation to Passerine and Raptor bird groups.

2.2 CONSIDERATION OF STATISTICAL RIGOUR OF APPROACH

To ensure we have developed a survey approach that will collect sufficient data to enable a statistically rigorous evaluation to determine if the operation of the wind farm is having an effect on birds or bats, we have consulted with a statistical expert (Dr Elizabeth Stark, Symbolix Pty Ltd) to examine the overall approach.

With regard to the bird utilisation surveys, Symbolix note that "The survey design and effort undertaken for the baseline surveys appears to be in line with (or better than) the baseline survey effort at other Australian wind farm sites. Provided that post-construction surveys match the timing, location and effort of these baseline surveys the data set should be sufficient to measure before-after patterns and infer if these patterns differ between control and impact sites." (refer to letter of advice included at Appendix C).

With regard to the bat survey component, a detailed summary of the latest methods was not able to be supplied to Symbolix as some of the final methods (i.e. RSA-level monitoring etc) had not yet been finalised to provide a consolidated methods statement for their review and comment. Notwithstanding this, numerous discussions were undertaken with Dr Stark about the general approach undertaken for the bat surveys. Dr Stark noted that the use of bat detectors has very limited application with respect to detecting changes in population abundance as the number of calls files cannot be used as a surrogate for the number of individuals present and contributing to the calls recorded. As such, the data cannot be used reliably to determine whether the wind farm is resulting in a decline in the population abundance of a species. Nevertheless, the use of detectors can be seen as a good measure of presence/absence of species, and can therefore be useful to detect changes/trends in habitat utilisation, from which it can potentially be determined whether the wind farm is resulting in habitat avoidance impacts for a given species.



3 DETAILED SURVEY METHODS

3.1 BIRD UTILISATION SURVEYS

The baseline bird surveys are broadly divided into passerine and raptor surveys, and includes timed point-count utilisation surveys as well as opportunistic observations as described below for each group.

3.1.1 Passerine bird surveys

The passerine¹ bird surveys includes a standardised truncated bird survey involving a 20 minute point count method, with 2 observers stationed at nominated survey sites (see further below for a description of the number and location of survey sites). The observers ensure that they are positioned to have an adequate, clear view of the surrounding landscape (to the greatest extent possible) to maximise the ability of observing all birds within the area. The details recorded during each survey include:

- date, time, site number, GPS co-ordinates, temperature, wind, general habitat description
- Bird observation records, including species, count (number of birds seen if possible), time of observation, distance of bird/s to observer, flight height², flight direction, other notes where possible including habitat flown from/to, distance of flight, any other pertinent observation on the sighting

A detailed summary of the survey methods is provided at Appendix D.

3.1.2 Raptor surveys

The raptor³ bird surveys includes a standardised truncated bird survey including a 30 minute point count method similar to the passerine bird survey, but with an added 10 minutes of observation time to account for the (generally) lower abundance of these species, as well as an added focus on the flight behaviour (including a minor modification to the data sheet for recording height, direction, landscape etc). As with the passerine surveys, the survey team spend a brief amount of time (approx. 15 minutes) together viewing structures of a known height in order to try and calibrate their visual estimation of height.

The selection of site locations for the raptor surveys will utilise the control and impacts sites already described. Areas where a strategic view is afforded (i.e. along ridgetops and not in deep and/or heavily vegetated gullies) have been selected to the greatest extent possible, however, given that certain habitat types (such as the River Red Gum) only occur within the gullies, it was inevitable that some survey sites would require the location to be lower down in the gullies/valleys.



¹ Passerine birds are defined by the arrangement of their toes and are sometimes known as perching birds or, less accurately, as songbirds.

² Prior to the commencement of surveys, the survey team will spend a brief amount of time (approx. 15 minutes) together viewing structures of a known height in order to try and calibrate their visual estimation of height.

³ Raptors are birds of prey and include eagles, hawks, falcons and the like.

3.1.3 Opportunistic Records

During the general driving and walking around the site (including movements into and out of the site from public roads etc) opportunistic records of birds are recorded wherever possible.

3.1.4 Number and location of bird surveys:

A total of 48 sites are included in the survey as follows:

- 29 Passerine (10 Control and 19 Impact sites)
- 19 Raptor (8 Control and 11 Impact sites)

The number of surveys was derived from consideration of the overall area (ha) of the development footprint, as well the variety of different vegetation types where the impacts would occur. The final survey density was then derived by a combination of the overall area of the site, the number of turbines and the total RSA of the development based on the number and design parameter of the turbines, as follows

- Turbine type = GE Turbine (GE 3.43-130) with a diameter of 130m.
- Turbine RSA (single) = 13,273m²
- Total RSA for Stage 1 (58 Turbines) = 769,834m²
- Survey Density = one survey site per 16,038m² of RSA

The survey density compares favourably with other bird and bat baseline surveys, including/such as Boco Rock Wind Farm which had one survey site per 17,540m².

The number and location of the passerine and raptor survey sites are the same as for the Summer 2016 surveys and are described in Tables 1 and 2 below and shown in the Survey Effort figure at Appendix A.2.

3.1.5 Summary of Bird Utilisation Survey Effort

A summary of the overall bird survey effort for the collection of the baseline data is provided below, including a summary of the survey effort within each habitat type across the study area. The same number and location sites has been consistently applied across all survey seasons.

For the habitat types assessed, the following codes are used:

- MD = Mulga Dead Finish (open) woodland
- PG = Porcupine Grass sparse woodland
- RR = River Red Gum riparian woodland
- BB = Bluebush shrubland

Table 1 Passerine bird survey effort

Impact				Control			Total	
MDF	PG	RR	ВВ	MDF	PG	RR	ВВ	
13	2	3	1	4	2	3	1	29



Table 2 Raptor bird survey effort

Impact			Control			Total
MDF	PG	RR	MDF			
8	2	1	3	2	3	19

The overall stratification of the bird survey design, including the habitat type that each site is located within, as well as the allocation of each site as either a Control Zone or Impact Zone site, is summarised in Table 4.

3.1.6 Timing of Bird Surveys

As stated above, to account for seasonal difference, the baseline surveys will be conducted over different seasons, including summer, autumn winter and spring. The table below details the survey timing of the bird surveys (including an indication as to the current status of these surveys as being complete or yet to be undertaken).

Table 3 Seasonal timing of bird surveys

Season	Status
	Completed
Summer	(December 2016)
	Completed
Autumn*	(May/June 2017)
	Completed
Winter*	(May/June 2017)
	Completed
Spring	(October 2017)
	Not yet undertaken.
Autumn	Scheduled for March (2018)

^{*}Autumn and Winter were combined for the bird surveys given the generally low number of birds expected to occur at this time of year. Future surveys are to separate these into distinct seasons. A March 2018 survey will be conducted to add further Autumn data to capture possible migratory species movements at that time of year.

It is expected that the future operational surveys would be conducted at a minimum during each season independently, if not more regularly as determined in the BAMP.



Table 4 Schedule of Survey Sites

Site No	Passerine	Raptor	Control	Impact	HABITAT
1	Р			I	MDF
2	Р			I	RR
3		R		1	RR
4		R		1	MDF
5	Р			Ī	MDF
6		R		Ī	MDF
7	Р			1	PG
8		R		1	MDF
9	Р			1	RR
10		R		İ	MDF
11	Р			İ	MDF
12	Р			Į.	MDF
13	Р			I	MDF
14		R	С		PG
15	Р		С		PG
16	Р			I	MDF
17	Р		С		MDF
18		R	С		RR
19	Р		С		MDF
20	Р		С		RR
21		R	С		MDF
22	Р		С		MDF
23	Р			I	MDF
24	Р			I	MDF
25		R		1	MDF
26	Р		С		RR
27		R	С		RR
28		R	С		MDF
29		R	С		RR
30	Р		С		RR
31	Р		С		ВВ
32	Р			1	ВВ
33		R		ı	MDF
34	Р			1	MDF
35	P			1	MDF
36	P			ı	MDF
37	P			l	MDF
38	Р			i	MDF
39	Р		С		MDF
40	P		С		PG
41	Р			l	PG
42	Р			l	RR
43		R		l	MDF
44		R	С	-	MDF
45		R	С		PG
46		R		I	PG
47		R		i	PG
48		R		i	MDF
TOTAL	29	19	18	30	



3.2 BAT SURVEYS

The bat survey scope has been updated from the completed Summer 2017 and Autumn/Winter 2017 surveys. Specifically, the survey locations have been revised to add new sites to increase the overall survey area covered, and the survey methods have been amended to included bat surveys at the RSA height, as has been discussed with OEH, and recommended by their expert review (M. Pennay, 2017).

The revised bat survey methods are explained further below. It is expected that this updated approach will also form the basis of the future ongoing operational monitoring to be established under the BBAMP.

The specific survey methods to be employed as both once-off and ongoing survey monitoring include a mixture of both trapping and passive call recording. Each survey method and the intended use of that method is described further below.

3.2.1 Trapping

Generally, trapping will not be used as an ongoing survey method. However, given that there have been some difficulties in obtaining conclusive positive species identification for some species, a once-off trapping program is planned to coincide with the use of bat detectors. The physical capture and identification of specimens at the same time that calls are being recorded will enable a more conclusive identification of the species included in the call analyses (described further below).

Specifically, the species of interest with inconclusive call results to date and for which trapping will be targeted include the following:

- Inland Forest Bat (Vulturnus baverstocki) or Little Forest Bat (V. vulturnus) (or both).
- Bristle-faced free-tailed bat (*Mormopterus eleryi*) or Little broad-nosed bat (*Scotorepens greyi*) (or both).
- Corben's Long-eared Bat (Nyctophilus corbeni) or Lesser Long-eared Bat (N. geoffroyii) (or both).

Once the species have been confirmed, this survey method is no longer required and would not continue as part of the ongoing operational monitoring of the wind farm.

A total of four trapping sites will be established (and potentially more if time/weather permit). One night of trapping will be conducted at each site. The location of trapping sites will be finalised during the establishment of the bat detectors to identify suitable sites based on the presence of habitat features including hollow-bearing trees (roost/shelter habitat) and water (for foraging habitat). The trapping will occur concurrently with bat detector survey work at the same location/time for comparison of call results with trapping results.

3.2.2 Bat Detectors

The main survey technique to be employed for both the current baseline data collection as well as on an ongoing operational monitoring basis is the use of passive bat call detection units, including both Anabat and Songmeter units, utilising both Zero Crossing Analysis as well as Full Spectrum call file analysis.

The use of call detectors is well established in the current literature, and is a recognised survey technique in both the NSW and Commonwealth survey guidelines (as applicable). Details on the efficacy of this technique does not require further consideration, although it is noted that the use of call file numbers of a species on any particular survey occasion (night), is not regarded as a good surrogate for estimating population abundance (as only a small number of individuals can repeatedly fly around/near a detector yielding a large number of call files, suggesting a much larger number of individuals than what is actually



present). The use of bat detector call recording for determining presence/absence of species, particularly if coupled with a trapping study as described above, is well accepted.

The overall scope and effort, including the total number and rational for siting of call detectors is described further below.

Ground vs RSA level monitoring

A main critique of the work conducted to date for the baseline data collection has been the absence of monitoring of bats flying within the Rotor Sweep Area (RSA). Given that bat species composition and activity levels within the RSA may not be the same as those recorded at ground level, monitoring at RSA is required.

One of the challenges to undertaking monitoring at RSA at the Silverton Wind Farm Project Area is that only existing meteorological monitoring masts (Met Masts) are available for RSA level monitoring. There are no other structures existing or proposed within or near the site that would enable mounting a bat detector unit above a minimum required height of 35 m (lowest point of RSA). We explain further below issues preventing the use of other potential options for RSA level monitoring.

In considering the use of the Met Masts, presently there are only 3 permanent meteorological monitoring masts (Met Masts) within the Stage 1 (58 Turbine) Project Area available for use on an ongoing basis (Masts MM1, MM2 and MM3, refer to the table below).

Other Met Masts that were used in the development of the project are no longer available for a number of reasons, including mainly that the existing previous masts in the Stage 1 project area were established for temporary use only, with the intention that they would eventually be replaced with permanent wind monitoring masts, in different locations. Also some of the masts were established for wind monitoring for other stages of the larger(unapproved) project which at this point in time are not being pursued, and those masts are now located on properties that are not currently signed up to the (approved) project. Consequently, there is no existing agreement between the landowner and the proponent to allow ongoing access to these masts and they will also be removed. Furthermore, the distance from these other four mast sites to the Stage 1 Project Area (more than 10km) means that any data gained from these site may have limited application to the Stage 1 Project Area.

Other opportunities for establishing units at RSA level have been considered (i.e. helium weather balloons), and these were found to be unsuitable for use at an operational wind farm (refer to responses to OEH Expert

The locations of the Met Masts MM1, MM2 and MM3 that are able to be used for the baseline data collection and subsequent operational monitoring are described in Table 5 below and shown also in the Survey Plan accompanying this document.

Table 5 Met Mast locations for RSA level monitoring

MAST	Easting	Northing	General Location	Habitat Type
MM1	528825.6	6489040.8	Impact*	MDF
MM2	520504.6	6482354.9	Impact	MDF
ммз	524804.3	6479164.3	Impact*	MDF

^{*}Note: MM1 and MM3 are located outside the 500 m Impact Zone buffer, but not past the 1km buffer for the Control Zone. As these masts cannot be moved, they have been ascribed as Impact Zone sites.



In summary, all three masts are located within the Impact Zone (noting that masts MM1 and MM3 are located in the *Intermediate Zone*; i.e. the area between the 500m Impact Zone and the 1km buffer for the Control Zone. For the purposes of this survey protocol, these sites be treated as Impact Zone monitoring sites as neither the masts nor the turbines can be moved to allow location entirely within either Control or Impact Zones.

For the RSA-level monitoring, the detectors will be mounted at approximately 65m height. Full-spectrum records (i.e. Anabat Swift or songmeters) will be used for the RSA-level monitoring.

For the bat detector survey sites to be deployed at ground level only (discounting the fixed position of the units to be deployed at about ground-level on met masts MM1, MM2 and MM3), there is greater flexibility in the site selection process. However, site selection for these detectors was still limited by a sufficient amount of available habitat within both the Control and Impact Zone areas of the site to allow a BACI design to operate.

A description of the survey site selection of the ground-only bat detector monitoring, is described further below. The general approach taken in developing this method is as follows:

- i) Identify which vegetation communities constitute Priority Habitat to be targeted for sampling
- ii) Identify which existing survey sites (from Summer 2016 and Autumn/Winter 2017) are suitable as sites for repeatable ongoing sampling

In taking this approach, we have developed a consolidated list of survey sites that we propose are suitable for use on an ongoing basis. We also make comment below on how the consolidated list of sites meets the requirements for a sufficiently stratified BACI design, how they will meet the recommendations of the OEH Expert Report as well as the requirements of the Commonwealth's *Survey guidelines for Australia's threatened bats* (DEWHA 2010).

We list the (new and revised) survey sites in Table 7. Each site has been allocated a new numbering system to be used from this point forward to avoid any confusion resulting from giving each survey site a number related to the individual Anabat unit. The new numbering will relate to the site location and not the actual bat detector unit number as has happened in the past. This includes going back to the previous Summer 2016 and Autumn/Winter 2017 surveys and revising the map and reports to use this new numbering so that future comparisons between seasons/years at the same site can be more readily made.

Rationale for site selection

Identification of Priority Habitat Areas

As per the comments made in the OEH Expert Report (M. Pennay, 2017), the main focus of survey effort should be toward Priority Habitat Areas. These Priority Habitat Areas are considered to be areas within the suite that provide important habitat features for bats, and include areas of woodland with potential for hollow-bearing trees (important for roosting habitat), as well as areas that support or are in close proximity to water resources (both permanent and ephemeral). Areas that provide a propensity to support both hollow-bearing trees as well as water are considered to be of the highest priority in terms of potential bat habitat.

Note that given the very large size of the site, a detailed hollow-bearing tree survey has not been completed for the project, and as such, the occurrence of hollow-bearing trees as part of a Priority Habitat Area is not based on survey information, but on the likelihood of hollows, inferred from the observed vegetation structure and composition of various vegetation community types mapped across the site.



Note also that whilst some (generally) permanent water resources are known to occur within the project site (mainly Umberumberka Reservoir, and a large farm dam in the southeast corner (at the location of Anabat Unit AE-6 from the Autumn/Winter 2017 survey period)), all potential water resources within the site have not been formally mapped (as either permanent or ephemeral). Whilst it is likely that the larger stream orders are likely to contain water from time to time, including larger pools where water may occur on a more permanent basis, this has not been specifically assessed or mapped. As such, targeting water resources for deployment of bat detectors may not result in consistent repeatable sampling with respect to habitat availability, as a large inundated pool section of a stream in one season/year may be completely dry during other seasons/years.

A summary of the occurrence of Priority Habitat Areas within the site based on the existing vegetation mapping is given in the table below.

Table 6 Identification of Priority Habitat Areas within the site

Vegetation Community Type	Habitat features for bats			
Mulga Dead Finish woodland	as well as anhamoral stream gullies not supporting Diver Ded Cum			
	Generally in poor condition with disturbance from grazing/browsing. Given extensive occurrence (circa 90% of total site area), with some			
	potential for hollow-bearing trees and water resources, and likely to be foraging habitat, this habitat type has been identified as Priority Habitat.			
Mulga/Red Mallee shrubland	Mallee Generally devoid of any water resources. Some potential for hollows to be present within Red Mallee trees (<i>Eucalyptus socialis</i>) that may be used as roost sites. Is limited to some (relatively small) patches in the northeast of the site.			
Porcupine Grass (Spinifex) sparse woodland	ifex) sparse Mallee/Gum-barked Coolibah trees (<i>E. intertexta</i>), which have been observed to contain smaller spout-hollows which are often			
Prickly shrubland Wattle Wattle Shrubland Wattle Wattle Second order drainage lines. May contain some temporary water resources during periods of high rainfall, though pools of water unlikely. Highly unlikely to support any tree hollows.		No		
River Red Gum on rocky creeks	Very small occurrence within site, limited mainly to smaller first and second order drainage lines. May contain some temporary water resources during periods of high rainfall, though pools of water unlikely. Contains mature River Red Gum trees, therefore likely to support tree hollows.	Yes		
	Note that this vegetation type is regarded as constituting essentially the same habitat type for bats as the River Red Gum Woodland			



vegetation unit below, typified by large River Red Gum trees along				
	low-lying valley floors and larger gullies.			
River Red Gum woodland	strooms and above. Likely to support anhamoral water resources			
Black Bluebush shrubland	This vegetation community is characterised by low shrubs, and generally devoid of mature trees. Although mapped in areas close to River Red Gum riparian zones, this community often commences once the riparian zone influences end, and as such there is very low potential for hollow-bearing trees, and limited water resources (with the drainage gullies where the water occurs likely to support either River Red Gum woodland or Prickly Wattle shrubland).	No		
	This community does not occur at or near any turbines.			
Black Oak woodland	This woodland occurs in very small patches, and has not been mapped within the project area as occurring in a patch size greater than a few hectares. Woodland areas may support hollows, but given small sporadic occurrence, no mappable habitat areas of this vegetation community type occurs within the Stage 1 58 turbine project area. As such, it is not possible to survey within this vegetation type within the Impact Zone.	Yes (but doesn't occur within the site)		
Bluebush shrubland	This vegetation community is characterised by low shrubs, with only minimal scattered trees, and consequently there is considered to be very low potential for hollow-bearing trees to occur in these areas. Although mapped in areas close to River Red Gum riparian zones, there are no identified water resources within this community (with the nearby drainage gullies likely to support River Red Gum).	No		
	This community does not occur at or near any turbines.			
Chenopod (Saltbush) shrubland	This vegetation community is characterised by low shrubs, with only minimal scattered trees, and consequently there is considered to be very low potential for hollow-bearing trees to occur in these areas. This vegetation community occurs in a broad swathe across lands to the south-east of the Project Area, including on lands surrounding ephemeral water courses, but does not extend into (or within 1km of) any of the turbine sites	No		
Chenopod – Red Mallee woodland/shrubland	This vegetation community is characterised by a mix of predominantly low shrubs with scattered to continuous Mallee trees. There is some potential for hollows to be present in the Mallee trees which may be used as roost sites. This vegetation community occurs in patches to the east of the Project Area, but does not extend into (or within 1 km of) any of the turbine sites. Also, this community does not appear to support any notable water courses (although very minor unnamed stream order 1 gullies may be present).	Yes (but doesn't occur within the site)		

In summarising the table above, the following Priority Habitat Areas are considered to occur at the site:

- Mulga Dead Finish
- Mulga/Red Mallee Shrubland
- Porcupine Grass (Spinifex) sparse woodland



- River Red Gum on rocky creeks
- River Red Gum woodland
- Black Oak Woodland
- Chenopod Red Mallee Woodland/Shrubland

When considering the appropriate number of survey sites to be established within the Priority Habitat Areas, it is important to note again that this survey program has been designed as a BACI survey with the aims of observing changes over time in the bird and bat species utilisation and associated impacts from operation of the Silverton Wind Farm. As a BACI survey design, it is therefore imperative that all aspects of the proposed survey are repeatable so as to allow collection of data both *Before* and *After* the commencement of operation of the wind farm, as well as to obtain data from both *Control* and *Impact* sites. The OEH Expert Report notes specifically that:

at a minimum it would be expected that at least 2 sites (1 impact & 1 control) would be sampled in each high priority community There are 5 vegetation communities with trees/shrubs reaching > 5m height. If each of these communities is sampled with a control and impact site the total minimum effort required to produce a meaningful result would be 5 communities x 2 conditions (control/impact) x 2 detectors x 4 nights = 80 detector nights per season. Plus, an additional 8 detector nights for other sites selected to capture spatial variability and other priority areas such as wetlands.

As a guide, the Commonwealth threatened bat survey guidelines recommend sampling at a rate of 16 detector nights per 50 ha

The main issue with compliance the above comment is the (incorrect) assumption that all priority habitat areas occur both within the Control and Impact Zones as established for this survey program. It is noted that the only vegetation communities <u>identified as Priority Habitat Areas</u> and that have been mapped as occurring within both the Impact Zone (i.e. within 500m of a proposed turbine site) and Control Zone (i.e. more than 1km from a proposed turbine), and which support a large enough patch size in each zone to establish at least 2 Control and Impact Zone survey sites include the following:

- Mulga Dead Finish (MDF)
- Mulga/Red Mallee Shrubland (MRM)
- Porcupine Grass (Spinifex) sparse woodland (PG)
- River Red Gum (includes both the River Red Gum Woodland and River Red Gum on Rocky Creeks mapped vegetation units) (RRG).

In order to achieve a properly implemented BACI survey, only these areas of the site can therefore be surveyed on an ongoing basis to allow both Control and Impact site data collection. Based on this scenario, the total extent of habitat of each of these areas within the Impact (and Control) Zones is summarised in Table 8 below.

Identification of existing survey sites suitable for ongoing use as repeatable survey sites

We have reviewed the existing survey sites from the Summer 2016 and Autumn/Winter 2017 survey periods in the context of the comments included in the OEH Expert Report to determine which of these sites are adequate for continued use in the survey program moving forward. In particular, the existing sites to be kept were assessed on the basis of the following criteria:

 Location within either the Impact or Control Zone (i.e. sites located in the "intermediate zone", being the area >500 m from a proposed turbine, but <1 km where the Control Zone boundary occurs are not to be continued)



- Quality of data already collected (for example, the site SM2 from the Autumn/Winter 2017 survey did not record any bats, and so there is no existing data from this location that would facilitate future comparative analysis that would make this site worthwhile keeping)
- Location in the landscape in terms of achieving adequate coverage of different habitat areas to meet the requirements for a stratified design with sufficient sites to allow a statistically meaningful result

Given the above considerations, the existing survey sites that are proposed to be kept for ongoing monitoring are detailed in Table 7 below.

Table 7 Existing sites to be kept for ongoing monitoring (including sites where a minor relocation is required)

Summer 2016 Site No.	Autumn/Winter 2017 Site No.	Control/Impact site	Habitat Type	Rationale		
Retained Sites						
A1-A	n/a (close to paired unit AE-5b)	IMPACT	MDF	Kept as useful for replication and existing baseline data (new site number BD8).		
A4-B	SM1	IMPACT	MDF	Kept as useful for replication and existing baseline data (new site number BD4).		
n/a	AE-5a	CONTROL	MDF	Kept as useful for replication and existing baseline data (new site number BD6).		
АЗ-В	AE-4	IMPACT	RRG	Kept as useful for replication and existing baseline data (new site number BD12). Next to waterbody and likely HBTs.		
		Minor Reloca	ited Sites			
A2-A	AE-2	CONTROL	RRG	Previously in "Intermediate Zone". Minor relocation, approx. 150-200 m from current site, to Control Zone (new site number BD9). Next to waterbody and likely HBTs within RRG habitat type.		
A4-A	AE-3	IMPACT	RRG	Previously in "Intermediate Zone". Relocation, approx. 2 km E from current site, to Impact Zone (new site number BD10). Next to waterbody and likely HBTs, and remaining within same RRG habitat type.		
A1-B	AE-1	CONTROL	RRG	Previously in "Intermediate Zone". Minor relocation approx. 300m from current site to Control Zone (new site number BD11).		



		Next to waterbody and likely
		HBTs.

As can be seen from the table above, there are four (4) existing sites that were found to be suitable to retain for ongoing monitoring. Three (3) of these are located within the MDF habitat type (including two Impact and one Control site), and the fourth is located within the Impact Zone of the RRG habitat type. In addition to these, there are another three (3) sites that, if relocated to nearby areas (but outside of the "Intermediate Zone") would be suitable to retain for ongoing monitoring. All three (3) sites are located within the RRG habitat type, and includes two (2) Control Zone sites and one (1) Impact Zone site.

3.2.3 Final survey sites for ongoing monitoring

Based on the above considerations in terms of the distribution of Priority Habitat Areas, as well as having consideration for the ability to establish survey sites within both Impact and Control Zones (to achieve a BACI design), and in attempting to keep/re-use suitable existing survey sites where possible, we have identified 20 suitable survey sites to be established to achieve a robust stratified design. The proposed survey sites to be implemented from this point in time and going forward are described in Table 8 below, including identification of new site numbering to be used from this point forward.



Table 8 Proposed final survey sites

(New) Survey	Old Site No.	Proposed Location – Description	Control/Impact	Habitat Type	Near Water	Paired Unit
Site No.	(2016 / 2017)		site		Resource?	
		MULGA DEAD FINISH				
BD1A	N/A - New	Met Mast MM1 – Ground mounted unit (mounted @2-3m height	IMPACT^	MDF	No	BD1B &
						BD13/14
BD1B	N/A - New	Met Mast MM1 – RSA mounted unit (mounted @65m height)	IMPACT^	MDF	No	BD1A &
						BD13/14
BD2A	N/A - New	Met Mast MM2 – Ground mounted unit (mounted @2-3m height	IMPACT	MDF	No	BD2B & BD5
BD2B	N/A - New	Met Mast MM2 – RSA mounted unit (mounted @65m height	IMPACT	MDF	No	BD2A & BD5
BD3A	N/A - New	Met Mast MM3 – Ground mounted unit (mounted @2-3m height	IMPACT^	MDF	No	BD3B & BD6
BD3B	N/A - New	Met Mast MM3 – RSA mounted unit (mounted @65m height	IMPACT^	MDF	No	BD3A & BD6
BD4	A4-B / SM1	Ground-mounted unit in same location as previous site A4-B/SM1.	IMPACT	MDF	No	BD5 & BD6
BD5	N/A - New	Ground-mounted unit approx. 500m N of bridge over	CONTROL	MDF	No	BD4
		Umberumberka Reservoir				
BD6	n-a / AE-5a	Ground-mounted unit in same location as previous site AE-5a	CONTROL	MDF	No	BD8 & BD3A
BD7	N/A - New	Ground-mounted unit located approx. 1km NE of MM1.	CONTROL	MDF	No	BD1A
BD8	A1-A / AE-5b	Ground-mounted unit located near T51	IMPACT	MDF	No	BD6
		RIVER RED GUM WOODLAND				
BD9	A2-A / AE-2*	Ground-mounted unit. Relocation of previous A2-A/AE-2 site	CONTROL	RRG	Yes	BD10
		approx. 2.5 km E to Control Zone, but staying within RRG along edge				
		of Umberumberka Reservoir				
BD10	A4-A / AE-3*	Ground-mounted unit. Relocation of previous A4-A/AE-3 site	IMPACT	RRG	Yes	BD9
		approx. 2 km E to Impact Zone, but staying within RRG (on rocky				
		creeks) along tributary of Umberumberka Reservoir arm/branch				
BD11	A1-B / AE-1*	Ground-mounted unit within RRG. Relocation of previous A1-B/AE-	CONTROL	RRG	Potential	BD12
		1 site approx. 300m North or 600m south to within Control Zone,				
		but staying within RRG. To be chosen/micro-sited for either/both				
		HBT & pool section				

BD12	A3-B / AE-4	Ground-mounted unit within RRG. Re-use of existing site A3-B/AE-	IMPACT	RRG	Yes*	BD11
DD12	AS B / AL 4		IIVII ACT	I	163	5511
		4. Micro-sited for either/both HBT & pool section				
		MULGA/RED MALLEE SHRUBLAND				
BD13	N/A - New	Ground-mounted unit within small patch of MRM approx. 2 km W	CONTROL	MRM	No	BD14
		of Turbine T23. Micro-sited for HBT if possible				
BD14	N/A - New	Ground-mounted unit within small patch of MRM immediately W	IMPACT	MRM	No	BD13
		of Turbine T24. Micro-sited for HBT if possible				
BD15	N/A - New	Ground-mounted unit within small patch MRM immediately S of	IMPACT	MRM	No	BD22
		Turbine T22. Micro-sited for HBT if possible				
BD16	N/A - New	Ground-mounted unit within small patch MRM approx. 1.5km E of	CONTROL	MRM	No	BD21
		Turbine T10. Micro-sited for HBT if possible				
	·	PORCUPINE GRASS (SPINIFEX) SPARSE WO	ODLAND	·		
BD17	N/A - New	Ground-mounted unit within PG, approx 500 m E of bird survey	CONTROL	PG	No	BD18
		sites R44.				
BD18	N/A - New	Ground-mounted unit within PG, near bird survey sites P35/R46	IMPACT	PG	No	BD17
		(near Turbine T33).				
BD19	N/A - New	Ground-mounted unit within PG, approx 1.5 Km E of bird survey	CONTROL	PG	No	BD20
		sites R44.				
BD20	N/A - New	Ground-mounted unit within PG, near Turbine T34.	IMPACT	PG	No	BD19

^{*=}Sites that are relocated to nearby new sites (but within same habitat type, and generally, moved less than 200m from current location)

^=Sites BD1A/BD1B & BD3A/3B, established on Met Masts MM1 and MM3 respectively, are actually located in the "Intermediate Zone", between the Control and Impact Zone buffers. As the Met Mast cannot be moved, these sites have been ascribed as Impact Zone sites.

BD = Bat Detector

In summarising Table 8 above, we note the following survey stratification is achieved:

- There are a total of three (3) paired units at RSA and ground level. All of these are defined as occurring within the Impact Zone though noting two of these are in the "Intermediate Zone". There are no other existing structures within the project area that units can be attached to for RSA level monitoring.
- RSA-level detectors will be mounted to permanent met masts at a height of 65m.
- There are a total of eight (8) sites within the Mulga Dead Finish (MDF) habitat type. This includes 5 x Impact sites and 3 x Control Sites.
- There are a total of four (4) sites within the River Red Gum (RRG) habitat type. This includes 2 x Impact sites and 2 x Control Sites. All Impact and Control sites are paired with a nearby detector (generally less than 1 km away) in the same habitat type but within the differing control/impact zone.
- There are a total of four (4) sites within the Porcupine Grass Sparse Woodland (PG) habitat type. This includes 2 x Impact sites and 2 x Control Sites. All Impact and Control sites are paired with a nearby detector (generally less than 1 km away) in the same habitat type but within the differing control/impact zone.
- There are a total of four (4) sites within the Mulga/Red Mallee Shrubland (MRM) habitat type. This includes 2 x Impact sites and 2 x Control Sites. All Impact and Control sites are paired with a detector (although only one can be paired with a detector within about 1 km away, the other survey opportunities for Control and Impact sites in this habitat type prevents pairing with a nearby detector).
- Bat detectors will be micro-sited at each location to be close to a Hollow-bearing Tree (HBT) if present/available, and/or any areas of pooled/standing water if present/available.
- There are a total of six (6) sites that have potential to be located next to a water resource. Two (2) of these are located next to a relatively permanent water source (i.e. Umberumberka Reservoir). The other four (4) sites could potentially be located next to a pool section along the stream gullies in the RRG habitat. However, given the ephemeral nature of these watercourses, it cannot be guaranteed that they will always be located next to available water throughout all seasons and across all years of the monitoring program.
- In total, across the entire study area there 11 Impact and 9 Control sites.
- The project will involve the deployment of a total of 23 Bat Detectors at 20 "sites" (noting that 3 sites will require two paired detectors for RSA and ground-level monitoring at Met Masts)
- Bat detectors at each site will be deployed for a minimum of 4 (consecutive) nights. As such, the total survey effort is 92 detector nights for this and each subsequent survey occasion.
- For paired sites, the same unit type will be used (i.e. Songmeters are to be paired with Songmeters and Anabats are to be paired with Anabats)
- The use of each detector type per site will be determined based on resourcing for the upcoming November survey, however it is expected that full spectrum analysis units will be used for the ground and RSA level monitoring at the Met Masts. Once finalised, the use of each detector type per Met Mast site will become enshrined in the BBAMP. For other ground-only monitoring sites, replication of the unit type for each site will be performed to the greatest extent possible.
- As we (or any other consultant that we know) do not have 23 bat detectors available at any one time, it is likely that the survey period will be divided into 2 x 4 night survey periods, with detectors used in the first 4-night period to be collected and redeployed for the second 4-night period. Therefore, it will be impossible to achieve data collection for all sites at exactly the same time.



In order to confirm the overall level of survey effort, the mapped extent of each community within the project area is summarised in Table 9 below.

Table 9 Summary of survey effort (number of sites per hectare of habitat type)

Vegetation Type	Number of Turbines	Area in Impact Zone (500m radius)	Number of Survey Sites (Impact & Control)	Survey Density (# survey sites / ha)
Mulga Dead Finish	57	2744.05 ha	8	1/343 ha
Mulga/Red Mallee Shrubland	0	23.68	4	1/6 ha
Porcupine Grass (Spinifex) sparse woodland	1	108.57	4	1/27.1 ha
River Red Gum Woodland + River Red Gum on rocky creeks	0	15.36	4	1/3.8 ha
Prickly Wattle Shrubland	0	47.3	0	0.0
Black Bluebush Shrubland	0	4.21	0	0.0
Bluebush Shrubland	0	0.64	0	0.0
Black Oak Woodland	0	0.0	0	0.0
Total	58	2943.81	20	1/147.2 ha

3.2.1 Timing of Bat Surveys

As stated above, to account for seasonal difference, the baseline surveys will be conducted over different seasons, including summer, autumn winter and spring. The table below details the survey timing of the bat surveys (including an indication as to the current status of these surveys as being complete or yet to be undertaken).

Table 10 Seasonal timing of bat surveys

Season	Status
	Completed
Summer	(December 2016)
	Completed
Autumn*	(May/June 2017)
	Completed
Winter*	(May/June 2017)
	Not yet undertaken
Spring	Scheduled for November 2017)
	Not yet undertaken.
Autumn	Scheduled for March (2018)

^{*}Autumn and Winter were combined for the bat surveys given the generally low number of birds expected to occur at this time of year. Future surveys are to separate these into distinct seasons.




A March 2018 survey will be conducted to add further Autumn data to capture possible migratory species or other seasonal movements at that time of year.

It is expected that the future operational surveys would be conducted at a minimum during each season independently, if not more regularly as determined in the BAMP.



APPENDIX A SURVEY PLAN



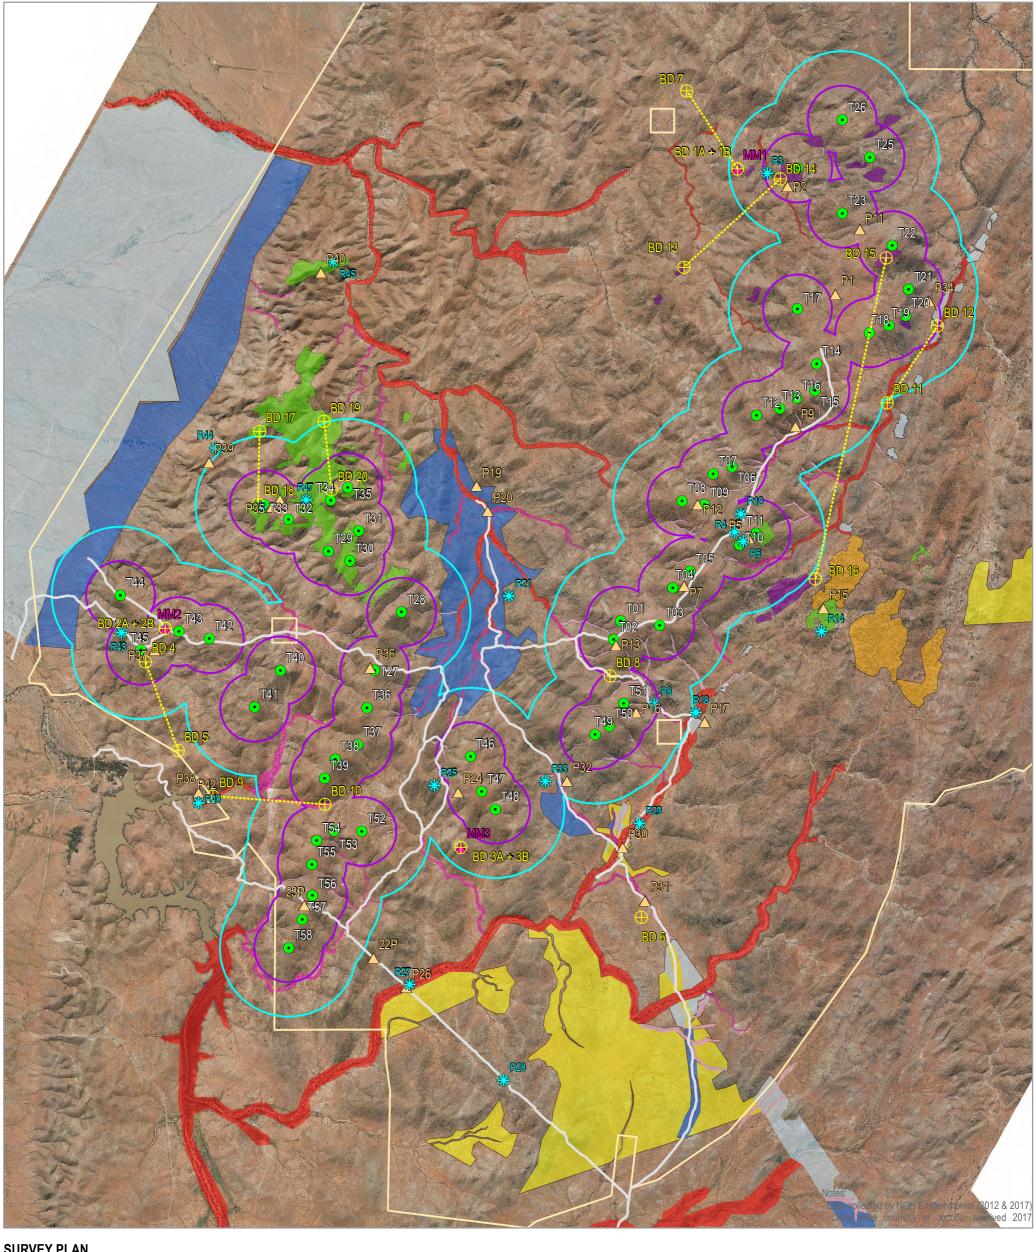

SURVEY PLAN

Silverton Wind Farm

- Turbine locations Wind Farm Site
- Existing tracks
- Impact zone (500m) Control zone (1km)
- Passerine survey
- Raptor survey
- ---- Paired units
- Bat detector survey sites
- Met Masts
- Vegetation types
- Black Bluebush Shrubland (ID153)
- Black Oak Woodland
 - Bluebush Shrubland (ID155)
- Chenopod
- Chenopod Red Mallee Woodland/Shrubland (VEG2)
- Mulga Dead finish (ID123)
- Mulga/Red Mallee Shrubland (VEG1)
 - Porcupine Grass sparse woodland (ID359)
- Prickly wattle Shrubland (ID136)
- River Red Gum on rocky creeks
- River Red Gum woodland (ID41)



APPENDIX B RESPONSES AGAINST EXPERT REPORT RECOMMENDATIONS



OEH (Expert) Recommendation	Response	Responsibility	
4.1 RECOMMENDATIONS TO IMPROVE THE RISK	4.1 RECOMMENDATIONS TO IMPROVE THE RISK ASSESSMENT:		
1. Mormopterus eleryi and Nyctophilus corbeni should be added to the risk assessment. The site should be surveyed for Mormopterus eleryi and Nyctophilus corbeni to confirm if present or not. 2. The risk status for all species should be reviewed given 29.5m above ground is not considered 'high' in terms of bat flight for most species. S. flaviventris, M. eleryi, C. picatus forage in and above canopy, they readily fly at 29.5m or above — and should be classified as high risk of collision. V. baverstocki and N. corbeni are likely to fly above 29.5m at times but most frequently forage within or below canopy height so could probably be classified as moderate risk of collision.	 The species-specific Risk Assessment table in the BBAMP is to be updated to include consideration of these species. The baseline surveys (as well as future ongoing operation monitoring surveys) will include consideration of these two species. The current use of bat detectors (as updated for the Spring 2017 survey period) will address the survey requirements for these two species, and the call file analysis (performed by an independent expert) will be briefed to ensure that they are aware that these 2 species are to be considered (including use of appropriate call references for confirming presence/number of calls at the site). This will be supported by a trapping study to be conducted to confirm species identification for those species whose calls are unable to be confidently determined (see response to recommendation 4.2 (1)). Noted. The species Risk Assessment table in the BBAMP is to be updated to revise the risk status of relevant species identified by the OEH Expert Report. NOTE: No (other) change to the baseline data survey methods is specifically required by this recommendation (with the exception of conducting RSA height monitoring as discussed elsewhere to confirm species flying at RSA height)	E&HP to update BBAMP NGH to implement baseline data collection and brief expert conducting call file analysis E&HP to update BBAMP	

NGH

3. Emphasis for bat monitoring should focus on representative sampling of sites in, adjoining or near to vegetation communities with trees or water sources (including ephemeral).

A detailed consideration of survey site selection is included in the document above, and describes where and how sites have been selected to achieve stratification across habitats, including achieving both Control and Impact sites. From this, it can be seen that there are a number of sites located in the River Red Gum community, which includes sites next to the Umberumberka Reservoir, as well as section along the larger/higher stream order that are likely to support water from time to time (noting that these streams are predominantly ephemeral and likely to contain water on an infrequent basis. Notes have been included in the updated design to inspect the stream to try and identify areas where larger pools of water are likely to form). An existing farm dam (the only dam known in the Project Area) has also been identified and will be targeted for ongoing monitoring.

With regard to hollow-bearing trees, a detailed hollow-bearing tree survey has not been completed for the site. When establishing new survey sites (or minor relocations of existing sites), attempts will be made to find nearby hollow-bearing trees and bat detectors will be deployed at these sites. It is noted that the highest proportion/density of hollow-bearing trees is likely to be within the River Red Gum areas, with only sporadic occurrences outside of these areas in the Porcupine Grass Sparse Woodland (PG) and Mulga Dead Finish (MDF) and Mulga/Red Mallee Shrubland (MRM).

Note that it is not possible for all potential habitat types (possibly) containing hollow-bearing trees to be surveyed, due to restrictions associated with establishing both Control and Impact sites. For example the River Red Gum on Rocky Creeks, Black Oak Woodland, and Chenopod – Red Mallee woodland/shrubland do not have any mapped areas extending into the Impact Zone of the site, and therefore cannot be surveyed under a BACI design.

4.2 RECOMMENDATIONS TO IMPROVE THE SURVEY DESIGN

1. To strengthen the conclusions of acoustic sampling results. Trapping / netting should be undertaken to confirm;	Noted. A single trapping study is proposed to be undertaken to confirm which species occur at the site. This will be undertaken concurrently with the Spring bat detection study to confirm species identification in the call analyses.	NGH
 a) if <i>V. baverstocki</i> or <i>V. vulturnus</i> (or both) are present at the site. b) if <i>Mormopterus eleryi</i> or <i>Scotorepens greyi</i> (or both) are present at the site. c) if <i>N. corbeni</i> is present at the site (<i>N. geoffroyii</i> almost certainly is). 	This method is not required on an ongoing basis as part of the BACI design for monitoring of wind farm impacts (it is purely to confirm species identification) and therefore, will only be conducted once and will not be continued as an ongoing survey monitoring technique. Trapping will be completed in late November 2017 and concurrently with the bat detector survey.	
2. To understand bat activity in the rotor sweep area it is recommended paired bat detectors be set to record at lowest rotor sweep height (e.g. c. 30-35m) and ground level. Detectors could be mounted on Met towers, turbine towers or other structures. If towers are not available within priority locations tethered helium balloons may be used.	We have 3 available Met Masts for use for mounting bat detectors at RSA level within the Stage 1 (58 Turbine) Project Area (Masts MM1, MM2 and MM3). These are detailed in the survey methods document above. It is noted that all 3 masts are located on ridgelines within the Mulga Dead-Finish habitat type, and are located within the Impact Zone, although 2 of these Masts MM1 and MM3 are located in the Intermediate Zone (>500m but <1 km from turbine location). There are no existing masts or other suitable structures within the Project Area in any habitat type.	
	Other masts located in the project area (SLV1, SLV5 and SLV7) as well as others located outside of the project area (several km's from nearest turbines) that have been investigated for use as well. All of these masts are temporary development masts and are to be decommissioned.	
	The main problem with meeting this requirement in full (i.e. achieving RSA level monitoring in a BACI design and across all Priority Habitat Areas) is the lack of any structure of any type within any other habitat type in the broader Project Area that could be used for monitoring at RSA height. In particular, the main priority habitat area for bats is considered to be within the River Red Gum woodlands which is restricted to the lower-lying gullies. No masts or turbines will be proposed in these habitats that could	

allow for future ongoing monitoring. Further, only a very small amount of this habitat actually occurs within 500m (i.e. within the Impact Zone) of any turbine.

We have also investigated a number of options for establishing RSA level bat detectors, with no suitable outcome achieved. Options considered include towing a large telescopic tower from more than 600 km away, at significant ongoing cost (as it will need to be repeated), but also is limited in that it must remain on flat terrain, and also, has wind speed loadings of 40 km/hr at heights of more than 40 m. The cost and limitations of this method means that it is clearly not feasible as an ongoing monitoring option.

Regarding establishing new/additional Met Masts, given there are only 3 <u>permanent</u> met masts in the area (with the previous development masts to be removed), there is no requirement by the client to install additional masts for wind speed monitoring. Further, the cost of such structures mean that it is not a feasible option to build more met masts .when not required

With regard to helium balloons – this has been considered however a number of problems are associated with this method at the site. Because the site is typically very windy (hence location for a wind farm), it will be difficult to ensure that the balloons remain at a constant height during strong winds, with the risk that they could be pushed back toward the ground. The other significant issue is the ability to undertake this on an ongoing basis during the operational phase of the windfarm. This method presents a substantial risk to the turbines should a balloon become untethered and float into and become entangled in the rotor blades which could then damage the turbine rotors. Because of these issues, this method has been discounted as a safe and reliable option for repeated use, and if not repeatable, it cannot be used in a BACI design.

We have also had discussions with the proponent about the feasibility of installing bat detectors on newly constructed turbines, and prior to their commencement of generating electricity (i.e. fully operational stage). This also has limitations as the blades would need to be mechanically braked (whereas normally they would be free-spinning until the generators are fully operational). The use of these brakes places strain on the

	rotor gears, as well as increased flex of the blades, and so is only suitable for short periods of time, before it starts to have an impact on the equipment. A period of 4 consecutive nights of full braking of the equipment is potentially too risky to very expensive equipment. It is therefore not likely that this method will be repeatable over	
	time. Further almost all of the turbines (>90%) are located within the same Mulga Dead Finish habitat type, and so this approach would not necessarily solve the problem of having monitoring in other priority habitat areas. The only other habitat types that turbines will be located in are the Bluebush (Saltbush) shrubland, and Porcupine Grass/Spinifex grassland/open woodland. Neither of these are considered Priority	
	Habitat Areas, given the general lack of larger hollow-bearing trees, although it is possible that bats may forage in these parts. If anything, bat use is likely to be higher in the Mulga woodland given the greater structural diversity of the woodland compared to the grassland and shrubland habitats.	
	Based on the above consideration, the obvious key point that becomes apparent in the BACI survey design is <i>what is achievable as an ongoing and regular monitoring option</i> . The sites regarded as suitable for bat detection on an ongoing basis are identified in report above, and have been selected on this premise and the limitations outlined above.	
3. If it is impossible to sample in the rotor sweep area for all sites, at a minimum paired sampling of ground based and rotor sweep area detectors should be undertaken and analysed, the results could then be extrapolated to inform ground based sampling.	Noted and agreed. It will not be possible to sample at RSA height in all priority habitat areas. Ground mounted bat detectors will be established in these areas as shown in the proposed survey plan, and results will be extrapolated as proposed in response below on statistical approaches.	NGH
4. The BACI design requires greater clarification;		

a. The metric(s) used should be defined – suggest species occurrence (present or not) and abundance (measured by the surrogate 'activity' defined as total # call passes per species per sample).	To date, we have provided the overall number of call files recorded as well as reported on the number of call files for threatened species. Other species not identified as being threatened or at risk were recorded simply on an occurrence basis. All historic call files could be re-analysed to provide the number of calls per species per sample. It is suggested that this should occur after the trapping study has been conducted to determine species will difficult call interpretation, as stated above.	NGH (with Glenn Hoye to re-analyse data)
b. The thresholds for adaptive management should be explicit, at what point should something happen. Suggest that at a minimum this be if a species occurrence or abundance has declined at an average rate of 3% / yr (this equates to the IUCN criteria of 30% decline over 10 years) that adaptive measures be triggered.	This is a matter to be addressed in the BBAMP. It does not otherwise specifically affect survey method. As stated above, the number of calls per species per sample can be completed and this will provide a base for identifying declines in occurrence or activity.	E&HP
c. The number and stratification of sites should be clearly enunciated. Sites should adequately sample identified priority areas based on risk and representative of the spatial heterogeneity of the site. The number of sites should be informed by statistical power analysis.	The number and stratification of sites is clearly explained in the survey methods document above. Site selection has been based on identification of Priority Habitat Areas, as well as the spatial distribution of these habitats to enable surveying within both Control and Impact zones. The overall distribution of bat survey sites across the Project Area is detailed in the survey effort plan (Appendix A). From this, it can be seen that a broad portion of the overall wind farm area is covered. There will be a minimum of 23 bat detector survey sites across the identified priority habitat areas, with detectors to record for 4 nights at each site. A total of 92 detector	NGH

	nights will therefore be achieved. This number is regarded as sufficient to enable adequate statistical analysis.	
d. Sampling of Control and Impact sites should be paired e.g each stratified control site should have a paired site in the same strata in impact zone (unless there is a good experimental design reason why not to) the effort at paired sites should be consistent and matched across seasons.	 Noted. All proposed sites have been paired based on either: RSA level sites are directly paired with a ground-mounted unit in the same location (at Met Masts). All (other) sites are paired with a Control and an Impact site located in the same habitat and (generally) within about 1 km of each other. 	NGH
e. Sites should not be located in indeterminate zones (eg >500m and less than 1km from a turbine) this is just confusing and messy.	Noted, existing sites in these areas will be moved as required to either within the 500m radius line of a turbine for the Impact Zone or beyond the 1 km area for the Control Zone. Note that this is not possible in relation to met masts MM1 and MM3.	
f. Unless there is a good reason to vary site pairs should stay the same across seasons. If the site location varies, at a minimum the strata and CI status should be consistent.	A Total of 4 units will be deployed at the same site as previous surveys, with a further 3 units to be relocated nearby (i.e. within 200m) to an existing site from the previous surveys. It is intended that all proposed survey sites in this document will be repeatedly surveyed during each season from this point in time onward.	
5. Survey effort needs to be consistent and capable of producing statistically meaningful results;	Noted. As stated in the document above, we have consulted with Symbolix on the revised survey and the survey effort and design is considered adequate for determining impacts of the wind farm operation on bat species.	
a. Power analysis should inform the number and duration of sampling to detect trends over a reasonable time. If the effort is less than 2	The revised survey plan will have at least 4 detectors in each habitat type (including at least 2 detectors in either the Control or Impact Zones), and will be deployed for at least 4 nights per season/survey occasion.	

detectors for 4 nights per site /season this will need to be explained in detail.	The overall survey effort will involve 23 detectors deployed for 4 nights each, equating to a total of 92 detector nights. Given this survey effort is to be repeated for each season/survey occasion going forward, this will allow adequate statistical power to identify impacts over time.	
b. The recommended survey effort needs to be clearly enunciated	The updated survey effort is clearly explained in the survey methods document above.	
c. Survey effort should be consistent between site pairs (control /impact) and across seasons so that comparisons can be readily drawn.	The latest survey plan shows that all sites now are sensibly located as pairs in similar habitats but between control and impact zones, and generally are located within about 1 km of each other (noting that a paired site cannot be closer than 500 m to each other, except when paired as a RSA level monitoring site at a Met Mast).	
6. Survey seasons need to be reviewed, lumping of Autumn and Winter together is not satisfactory as it misses the period of highest activity and risk of mortality (March). Suggest that sampling be conducted at a minimum in summer (November – January) ₁₆ and March. Winter and Spring could be conducted separately or as a merged season.	Noted. A survey is proposed for end of November and again in March. On completion of the March survey, all seasons will have been surveyed. For the longer-term operational monitoring, the plan will be to undertake surveys within each distinct season, and will be appropriately timed for conditions to be generally consistent with that seasonal norm. Where possible, surveys will generally be in the middle part of each season, and appropriately timed apart from each other (dependant on other factors such as timing to coincide with known peak periods of activity).	

APPENDIX C SYMBOLIX LETTER OF ADVICE





making your data work harder

To: Sam Patmore

NGH Environmental

Via email

Ref #: NGHSILV20171030

Date: 30 October 2017

CC:

Re: Review of methods regarding basline BUS monitoring at Silverton Wind Farm

Dear Sam.

I am writing in response to your request for advice as to the statistical suitability of the baseline bird utilisation data that NGH Environmental have collected at Silverton Wind Farm. I understand that NGH have designed field protocols consistent with a before-after:control-impact design, with the aim of testing for changes in the species cohort that might be attributable to the presence of wind farm infrastructure.

My team and I have analysed bird utilisation data at multiple wind farm sites in NSW, Tasmania and Victoria and have consulted on the statistical facets of bird and bat management plans at over a dozen Australian sites.

It is difficult to reference specific documentation due to the paucity of publicly available data post construction, but my review of your design draws upon our direct experience in the field as well as our statistical qualifications.

I have read the results of the autumn-winter surveys and reviewed the survey location map. The proposed survey design and effort is consistent with other Australian sites and should fulfil the requirements of the survey. I provide more details below.



Expected analysis methods

We can only assess the suitability of the survey design if we first understand the type of analysis that it will support. Broadly, the point of a before:after - control:impact design is to allow us to test for differences ('step changes' from before to after in the impact sites that differ from the change in the control sites. Additionally we might also want to test for trends that exist at the impact sites that differ from the trend at the control sites.

In this type of study there is always some uncertainty about how an "impact" might manifest, so a simple statistical test will not be enough to establish impact; nor will it provide much insight about what is causing the change or how it could be mitigated.

For this reason, we recommend that bird utilisation data is analysed through an ensemble of related metrics and analysis techniques. We generally recommend that the species mix be measured through:

- 1. The species richness (i.e. number of distinct species seen in a survey)
- 2. A measure of abundance/activity (number of individual movements seen)
- 3. A measure of ecological diversity such as the Shannon diversity index which combines abundance and richness in a single measure. This measure is useful because it's possible for a site to contain many species (high richness) and a high level of activity, but if the activity is dominated by only a few species we would not consider the site to be diverse.

To generate these metrics requires consistent counts of movements and species at consistent (control and impact) sites, before and after construction.

The trends and seasonal/site patterns in these metrics would usually be investigated visually through panel charts and tables. We would usually also test for statistically significant changes using linear modelling. This normally requires two or three years of data (e.g. one baseline, two after) but may not be conclusive if there is a lot of variability or strong seasonality. Often in these cases, it's simply not feasible to collect the amount of data required (e.g. it might require many years of monitoring) to resolve long term trends in a time frame that is useful for management. That's why we advise survey designs that allow for a range of descriptive and formal statistical analyses.

In addition to the metrics above we would also recommend the data be used to directly measure changes in species mix. This also requires consistent counts of activity per species. An ordination plot (as per Clarke (1993)) is an effective visual tool to identify changes in the species cohort (both step changes and trends) over time.



Note on detecting rare species

Please note that bird utilisation surveys will usually be unable to detect changes in the activity levels of individual threatened species (no matter how many surveys are conducted). We simply recommend that survey effort be sufficient to detect a large range of species (common and rare).

Review of the baseline survey protocols

I note the following features of the baseline surveys:

Definition of control and impact sites: Control sites are designated to be sites more than 1000m from each turbine. The definition of control and impact buffers around turbines is somewhat subjective, but this definition is in line with the definition used at other Australian sites.

Seasonal coverage: The surveys cover summer, autumn/winter and spring which allows for the full annual species mix to be surveyed and for coverage of all seasons.

Site coverage: The surveys cover a range of vegetation types and are randomly distributed throughout the control and impact areas, giving a good coverage of the conditions on and around the site.

Capable of detecting rare or threatened species: I note that a number of threatened species were detected during the autumn-winter surveys and 64 bird species overall. This suggests the survey effort is capable of detecting the range of species on-site, not just common species.

Data collected: The data collected during surveys includes:

- date, time, site number, GPS co-ordinates, temperature, wind, general habitat description
- bird observation records, including species, count (number of birds seen if possible), time of observation, distance of bird/s to observer, flight height, flight direction, other notes where possible including habitat flown from/to, distance of flight, any other pertinent observation on the sighting

This is sufficient to undertake the analysis suggested above. In addition, the inclusion of flight height allows us to identify those species most at risk of collision. Recording the distance from the observer to the bird is also useful, as it allows us to apply distance corrections and estimate flight densities per hectare. This is not strictly necessary for impact assessment but can be a useful analysis.



Conclusions

The survey design and effort undertaken for the baseline surveys appears to be in line with (or better than) the baseline survey effort at other Australian wind farm sites. Provided that post-construction surveys match the timing, location and effort of these baseline surveys the data set should be sufficient to measure before-after patterns and infer if these patterns differ between control and impact sites.

Regards,

Dr Elizabeth Stark

Managing Director - Symbolix Pty Ltd;

e: estark@symbolix.com.au; m: 0412 075 235.



References

Clarke, K. R. 1993. "Non-Parametric Multivariate Analyses of Changes in Community Structure." *Austral Ecology* 18 (1). Wiley Online Library: 117–43.

APPENDIX D DETAILED BIRD SURVEY METHODS

Bird Utilisation Surveys

Purpose:

To quantify which bird species are present, their numbers and activity levels and how they use the site. Data from utilisation surveys will be used to assess whether use of the site by birds changes once turbines have been installed and are functioning and to therefore gauge changes in populations.

Method:

- Surveys are completed through un-truncated point counts.
 - o Point counts are not limited to a defined search area and the observer should record all observations when seen.
 - Point counts will be 20 minutes in duration in which bird movements are recorded by continually scanning, noting the numbers of species and approximate distance to each unit. A unit can consist of an individual, or a flock. In the case of a flock, the approximate number should be estimated.
 - Each individual is noted when first sighted; should an individual disappear and a second (or potentially the same) individual appear later, this is noted as a separate sighting.
 - Surveys will be completed between dawn and dusk. The potential for collision can occur
 at any time a turbine is operating (i.e. 24 hrs / day), therefore bird movements require
 monitoring throughout the day to determine bird activity across this entire period.
- For each sighting, the following is recorded: time at first sighting, distance to first sighting (in metres), species, number, cue type (observed, heard). Metadata will also be recorded including weather conditions, wind speed and direction.
- For the additional raptor surveys, the height at which the bird is flying will be recorded (using a visual estimate), and the distance of the flight will also be recorded (wherever possible).

Additional Considerations:

As monitoring of wind farms and their potential impacts is a rapidly evolving field, the use of point counts is designed to allow for some flexibility in possible future application of the data.

Surveying of the pre-selected locations are conditional upon access, landholder logistics, and operating constraints.



APPENDIX E SUMMARY OF REVISED SURVEY PLAN AGAINST COMMONWEALTH GUIDELINES

We have considered the proposed survey strategy against the Commonwealth's *Survey guidelines for Australia's threatened bats* (DEWHA, 2010), and provide below a summary of the proposed survey strategy against the requirements set-out in the guidelines.

To begin with, none of the species that have been recorded at the site are nationally listed as threatened under the EPBC Act, and consequently, none of the species recorded at the site are included in the species profiles section of the guidelines which provides species-specific survey methods. Notwithstanding this, the general survey approach (i.e. techniques and effort) within the guidelines for species generally, has been considered in regards to the methods proposed under this survey. We summarise these further below, including a statement as to how the proposed methodology to be employed at Silverton Wind Farm will comply with, or otherwise not be inconsistent with the commonwealth guidelines.

SURVEY TECHNIQUES

The survey techniques listed in the commonwealth guidelines includes the following:

- Direct Capture methods (including use of Harp Traps, Mist Nets, Trip Lines, Hand Netting)
- Echolocation call detection
- Roost Searches
- Radio-tracking
- Chemi-luminescent tagging

Whilst the Guidelines recommend that a combination of both direct capture methods and use of echolocation call detection devices yields the best results, this (NGH) document deals only with the use of echolocation recording devices as a method for efficient ongoing monitoring. Direct capture will be employed on a one-off basis to ensure that species whose calls cannot be confidently identified can be confirmed by direct capture.

GENERAL GUIDELINE NOTES ON SPATIAL/TEMPORAL SAMPLING

Spatial Sampling:

The guidelines note that the number of sampling units within the study area (or strata) should be proportional to its size, a principle referred to as *area-proportionate sampling* (MacNally & Horrocks 2002). The Guidelines also note however, that a linear increase in sample number with area will become impractical at very large study areas.

This is especially the case with Silverton WF as it is a very large site, is difficult to traverse, and is dominated across the majority of the Project Area by a single habitat type (vegetation complex), being the Mulga Dead



Finish. As such, the number of survey sites required at SWF should not be directly proportionate in area compared with the survey density of many other smaller sites with more complex habitats.

Notwithstanding the above, the Guidelines document makes no comment on general survey density (eg number of detectors / ha of impact/site area), although for the species-specific methods, the survey effort is quoted based on a hypothetical site of 50 ha. For both species, the recommended effort is 16 detector nights over a minimum of 4 nights (i.e. 4 detectors set-up for 4 nights each over a 50 ha area). The Project Area (defined by the Impact Zone) is approximately 2943.8 ha. This survey methodology proposes the use of 23 detectors over 4 nights for a total of 92 detector nights. This equates to one detector every 147 ha (for four nights), which compares with the recommended one detector every 12.5 ha (for four nights). However, given the large distances between turbines and that each single turbine has an Impact Area of 78.6 ha (based on 1 km diameter), the recommended density is not considered directly applicable to this project, otherwise, 6 detectors per turbine would be required to achieve a comparable survey density to the guidelines. As an alternative measure, each turbine hardstand is approximately 30 m in diameter, which equates to a total hardstand area of 16.4 ha for the 58 turbines. This equates to one detector every 0.8 ha of hardstand. An alternative measure also is to consider the RSA as a measure of the "impact Area". As mentioned in previous method documents, the turbines will have a blade diameter of 130 m which equates to a total RSA of 13,273m² per turbine. This equates to a total of 76.98 ha for the total 58 turbines. Using this as a measure, the survey density would equate to one survey sites per 3.8 ha of RSA which compares favourably with the recommended survey guidelines.

Temporal Sampling:

The Guidelines note that "regular sampling over time is recommended as it will increase the probability that individuals will be detected on at least one occasion." The guidelines also note that repeated sampling over time, however is not always practical/possible and in this instance, "off-study area sampling is another means to address this problem, whereby sampling is conducted in suitable habitat in the area surrounding the study area. This procedure effectively increases the study area, allowing greater spatial sampling, and enhances the probability of detecting individuals with home ranges larger than the core study area. In practice, this will be a useful strategy because temporal replication is often more costly to implement than spatial replication, as additional travel may be required to and from the study area."

Whilst the implementation of the BBAMP will allow for repeated sampling over time (to determine operational impacts of the wind farm), including ongoing sampling (from October 2017 onward) of bats flying within the RSA (at the location of the existing Met Masts to be used).

SURVEY EFFORT

Echolocation call detectors

The Guidelines state that many survey standards recommend that 30–60 minutes of echolocation call survey per night for four to five nights is adequate for inventory surveys, whilst other studies state that recordings must be made across the entire night (de Oliveira 1998; Law et al. 1998; Duffy et al. 2000; Richards 2001). While many bat species are active soon after dusk, it is well known that the data from a stationary detector will rarely detect all species present at a site within one hour after dusk. For unattended bat detectors: should be set recording before sunset and stopped after dawn.

The Australasian Bat Society, Inc. (ABS) has produced a document detailing a set of minimum requirements for a transparent and sufficiently comprehensive consultative report of identifications made from acoustic



recordings. These are given in *Recommendations of the Australasian Bat Society Inc. for reporting standards* for insectivorous bat surveys using bat detectors), and have been adopted for these survey guidelines. The recommended survey effort and methods (as relevant to the Silverton WF Project) include:

- A description of the reference library used in the identification process.
- Details of the number of detector hours undertaken during the survey.
- A sample 'time versus frequency' graph of each species identified during the survey. These graphs must be of bats recorded and identified during the survey.
- For species with similar call characteristics, a written description of the characteristics used to distinguish these species must be included in the methods.
- An indication of the proportion of calls identified, i.e. the total number of calls processed and the percentage of these that were identified.
- All the call files from a survey are deposited ultimately with the client or agency.

In addition, this document also provides additional suggestions on survey effort and methods. Of relevance to the Silverton Wind Farm bat monitoring project are the following:

- Typical inventory survey effort should involve detector deployment for at least three complete nights in each major habitat type in the survey area.
- Surveys should be conducted during the warmer months of the year and in good weather conditions.

Note: the Guidelines make no further comment on survey density (eg number of detectors / ha of impact/site area).

In addition to the above, the Guidelines provide species-specific requirements for a number of nationally listed threatened bat species. The species that have previously been recorded at Silverton WF are not included in the identified species of the Guidelines. Notwithstanding this, two species have been considered from this list for consideration of any other relevant survey requirement that should be applied to the Silverton WF baseline survey project. These species and the survey requirements are listed below.

Bare-rumped sheath-tailed bat (Saccolaimus saccolaimus nudicluniatus)

Bat detectors (Anabat or other frequency division, or time-expansion detector; unattended) should be located in forest or woodland and ideally placed several metres above the ground (in trees or on poles), orientated upwards (at least 45°) towards gaps in the vegetation AND at waterholes/dams or in watercourses. Unattended detectors should be left overnight.

Unattended bat detectors to be used for a minimum of 16 detector nights and over a minimum of 4 nights.

Large-eared pied bat (Chalinolobus dwyeri)

Passive acoustic detection. A range of potential roost habitats can be examined by passive detection with unattended recorders placed in the vicinity of mines, caves and rocky outcrop, and also in foraging sites such as vegetation corridors and flyways, sandstone gorges, over watercourses, isolated waterholes and in representative vegetation types. Quality search-phase echolocation calls are diagnostic but these may not be recorded from bats emerging from underground roosts if bat detectors are placed at the entrance. Unattended detectors should be left overnight at multiple locations.

Unattended bat detectors to be used for a minimum of 16 detector nights and over a minimum of 4 nights.



From the above two species, it can be seen that Anabat surveys should be conducted over a minimum of 4 nights and achieve at least 16 detector-nights of sampling. Also, the focus of device location should be toward suitable habitats (though not specifically toward any type of habitat that happens to be present at a site). The surveys to be undertaken at Silverton have/will meet all of the above requirements.



APPENDIX F SUMMARY OF REVISED SURVEY PLAN AGAINST NSW THREATENED SPECIES SURVEY GUIDELINES

We have considered the proposed survey strategy against the NSW Threatened Biodiversity Survey and Assessment: Guidelines for Developments and Activities (DEC 2004), and provide below a summary of the proposed survey strategy against the requirements set-out in the guidelines for bats (noting that these guidelines are more directed toward assessments of impacts rather than ongoing monitoring surveys).

Methods

The guidelines note that some microchiropteran bat species are best identified by their unique ultrasonic echolocation calls (Woodside and Taylor 1985), while others can only be reliably identified by trapping (Helman and Churchill 1986). Therefore, a combination of both ultrasonic detection and trapping is essential as neither method can detect all species (Corben 1989; Parnaby 1992a, b; Duffy *et al.* 2000). Ultrasonic methods are more likely to record high-flying species but trapping methods are needed to detect low intensity echo locators (eg. long-eared bats and the golden-tipped bat) (Corben 1989).

Given the above, the proposed Silverton Wind Farm monitoring surveys are consistent with the recommended approach in that echolocators will be used for longer term monitoring, with a trapping study to be used in Spring to assist in species identification.

Effort

The guidelines note that the following key points with regard to survey effort:

- The location of traps and ultrasonic recorders should be in the areas of greatest potential activity (such as roost sites or near watering points)
- Bats are most active from October to March and sampling should be undertaken during this
 period (Lumsden and Bennett 1995). In other months, some bats may be active, particularly
 in northern NSW, however the probability of recording all the species that are present is
 reduced.
- Three hours of recording immediately after dusk is required to identify 90% of species present. Echolocation call detection should be conducted for a minimum of four hours, however recording for the entire night is recommended.

Each of the above recommendations for survey effort will be met by this Project, with a focus on stratifying survey points in Control and Impact Zones across the main habitat types, including extra survey effort for the River Red Gum Woodland areas regarded as being of primary importance in the landscape to bat habitat. Surveys will occur within the recommended timing of October to March and each detector will be programmed to record all night for four consecutive nights.

The suggested survey methods and effort for bats is defined in the table below (adopted from the NSW guidelines).



Method	Effort per 100 hectares (or portion thereof) of stratification unit targeting preferred habitat	Survey period
Ultrasonic call recording	Two sound activated recording devices utilised <i>for the entire night (a minimum of four hours)</i> , starting at dusk for two nights	October to March

Based on the above, and adopting the RSA as a surrogate measure for overall site area, the Silverton Project will have a total RSA of 76.98 ha for the total 58 turbines. Using this as a measure, the survey density would equate to one survey site per 3.8 ha of RSA which compares favourably with the recommended survey guidelines of one detector for every 50 ha of the stratification unit.

